

ARRONE®

316 Stainless Steel Collection




Style - Performance - Durability - Quality

ARRONE® 316 Lever on Rose Door Furniture



- Suitable for doors 40-60mm door thickness
- Supplied c/w wood screw & bolt through fixings
(4 point hexagonal fixing)
- 8mm x 110mm spindle
- Stainless steel underplate

"T"-Bar Lever on 6mm Rose (Sprung) - ø19mm





ID NO	PRODUCT REF	DESCRIPTION	FINISH
87100878	AR366/60-SP-SSS	Lever on rose	SSS
87100879	AR366/60-SP-PSS	Lever on rose	PSS

"T"-Bar Lever on 6mm Rose (Unsprung) - ø19mm





ID NO	PRODUCT REF	DESCRIPTION	FINISH
87104372	AR366/60-UN-SSS	Lever on rose	SSS
87104373	AR366/60-UN-PSS	Lever on rose	PSS

Non-Return Lever on 6mm Rose (Sprung) - ø19mm





ID NO	PRODUCT REF	DESCRIPTION	FINISH
87100884	AR363/60-SP-SSS	Lever on rose	SSS
87100885	AR363/60-SP-PSS	Lever on rose	PSS

Non-Return Lever on 6mm Rose (Unsprung) - ø19mm



ID NO	PRODUCT REF	DESCRIPTION	FINISH
87104368	AR363/60-UN-SSS	Lever on rose	SSS
87104369	AR363/60-UN-PSS	Lever on rose	PSS

Mitred Lever on 6mm Rose (Sprung) - ø19mm



ID NO	PRODUCT REF	DESCRIPTION	FINISH
87100876	AR364/60-SP-SSS	Lever on rose	SSS
87100877	AR364/60-SP-PSS	Lever on rose	PSS

Mitred Lever on 6mm Rose (Unsprung) - ø19mm

ID NO	PRODUCT REF	DESCRIPTION	FINISH
87104370	AR364/60-UN-SSS	Lever on rose	SSS
87104371	AR364/60-UN-PSS	Lever on rose	PSS

ARRONE® 316 Lever on Rose Door Furniture

- Suitable for doors 40-60mm door thickness
- Supplied c/w wood screw & bolt through fixings
(4 point hexagonal fixing)
- 8mm x 110mm spindle
- Stainless steel underplate

19mm Curved T-Bar Lever on 6mm rose - Sprung

ID NO	PRODUCT REF	DESCRIPTION	FINISH
87104374	AR367/60-SP-SSS	Lever on rose	SSS
87104375	AR367/60-SP-PSS	Lever on rose	PSS



19mm Wave T-Bar Lever on 6mm rose - Sprung

ID NO	PRODUCT REF	DESCRIPTION	FINISH
87104376	AR368/60-SP-SSS	Lever on rose	SSS
87104377	AR368/60-SP-PSS	Lever on rose	PSS



19mm Curved Lever on 6mm rose - Sprung

ID NO	PRODUCT REF	DESCRIPTION	FINISH
87104378	AR369/60-SP-SSS	Lever on rose	SSS
87104379	AR369/60-SP-PSS	Lever on rose	PSS



Scrolled Lever on 6mm Round Rose Stainless Steel Underplate (Sprung)

ID NO	PRODUCT REF	DESCRIPTION	FINISH
87100886	AR365/60-SP-SSS	Lever on rose	SSS
87100887	AR365/60-SP-PSS	Lever on rose	PSS




ARRONE® 316 Return to Door Lever on Rose Furniture

- Suitable for doors 40-60mm door thickness
- Supplied c/w wood screw & bolt through fixings (4 point hexagonal fixing)
- 8mm x 110mm spindle
- Stainless steel underplate




8mm Round Rose (sprung) - ø19mm Lever

ID NO	PRODUCT REF	DESCRIPTION	FINISH
87100872	AR361/10-SP-SSS	Lever on rose	SSS
87100873	AR361/10-SP-PSS	Lever on rose	PSS




6mm Round Rose (sprung) - ø19mm Lever

ID NO	PRODUCT REF	DESCRIPTION	FINISH
87100882	AR361/60-SP-SSS	Lever on rose	SSS
87100883	AR361/60-SP-PSS	Lever on rose	PSS




6mm Round Rose (unsprung) - ø19mm Lever

ID NO	PRODUCT REF	DESCRIPTION	FINISH
87103069	AR361/60-UN-SSS	Lever on rose	SSS
87103070	AR361/60-UN-PSS	Lever on rose	PSS



6mm Round Rose (sprung) - ø22mm Lever

ID NO	PRODUCT REF	DESCRIPTION	FINISH
87100874	AR362/60-SP-SSS	Lever on rose	SSS
87100875	AR362/60-SP-PSS	Lever on rose	PSS




6mm Round Rose (unsprung) - ø22mm Lever

ID NO	PRODUCT REF	DESCRIPTION	FINISH
87104366	AR362/60-UN-SSS	Lever on rose	SSS
87104367	AR362/60-UN-PSS	Lever on rose	PSS

ARRONE® 316 Return to Door Lever on 9mm Concealed Fix Rectangular Plate Stainless Steel Underplate (Sprung)

- Supplied with both wood screw and bolt through fixings
- Suitable for 40mm to 60mm door thickness
- Bolt through fixings suitable for UK locks and DIN standard locks
- 8mm x 110mm spindle

ID NO	PRODUCT REF	DESCRIPTION	FINISH
87100962	AR361/11-SSS	Long Plate Latch Furniture	SSS
87100963	AR361/11-PSS	Long Plate Latch Furniture	PSS
87100964	AR361/12-SSS	Lock Furniture 57mm Centres	SSS
87100965	AR361/12-PSS	Lock Furniture 57mm Centres	PSS
87100966	AR361/13-SSS	Euro Profile Lock Furniture 47.6mm Centres	SSS
87100967	AR361/13-PSS	Euro Profile Lock Furniture 47.6mm Centres	PSS
87100968	AR361/13-72-SSS	Euro Profile Lock Furniture 72mm Centres	SSS
87100969	AR361/13-72-PSS	Euro Profile Lock Furniture 72mm Centres	PSS
87100970	AR361/13-51-SSS	Euro Profile Lock Furniture 51mm Centres	SSS
87100971	AR361/13-51-PSS	Euro Profile Lock Furniture 51mm Centres	PSS
87100972	AR361/14-SSS	Oval Profile Lock Furniture 48.5mm Centres	SSS
87100973	AR361/14-PSS	Oval Profile Lock Furniture 48.5mm Centres	PSS
87100974	AR361/15-SSS	Bathroom Furniture 57mm Centres	SSS
87100975	AR361/15-PSS	Bathroom Furniture 57mm Centres	PSS
87100976	AR361/15-78-SSS	Bathroom Furniture 78mm Centres	SSS
87100977	AR361/15-78-PSS	Bathroom Furniture 78mm Centres	PSS



ARRONE® 316 Escutcheons, Bathroom Turns & Indicators - 6mm



Euro



Lever Lock



Oval



Bathroom Indicator & Turn



Disabled Indicator & Turn

Concealed Fixed Escutcheons (6mm)

- Ø 52mm with 38mm fixing centres
- 6mm thick roses
- Stainless steel understructure
- Wood screw fixings supplied
- Polished & Satin Stainless Steel (PSS/SSS)

ID NO	PRODUCT REF	DESCRIPTION	FINISH
87104380	AR361/70-SSS	Blind Escutcheon (No Hole)	SSS
87104381	AR361/70-PSS	Blind Escutcheon (No Hole)	PSS
87100948	AR361/67-SSS	Euro Profile Escutcheon	SSS
87100949	AR361/67-PSS	Euro Profile Escutcheon	PSS
87100946	AR361/66-SSS	Lever Lock Escutcheon	SSS
87100947	AR361/66-PSS	Lever Lock Escutcheon	PSS
87100950	AR361/68-SSS	Oval Profile Escutcheon	SSS
87100951	AR361/68-PSS	Oval Profile Escutcheon	PSS

Bathroom Turn & Indicators (6mm)

ID NO	PRODUCT REF	DESCRIPTION	FINISH
87100952	AR361/69-SSS	Indicator & Turn	SSS
87100953	AR361/69-PSS	Indicator & Turn	PSS
87104388	AR361/79-SSS	Turn & Release No Indicator	SSS
87104389	AR361/79-PSS	Turn & Release No Indicator	PSS

Bathroom Turn & Indicators (6mm)

ID NO	PRODUCT REF	DESCRIPTION	FINISH
87100958	AR361/69D-SSS	Disabled Indicator & Turn	SSS
87100959	AR361/69D-PSS	Disabled Indicator & Turn	PSS
87104390	AR361/79D-SSS	Disabled Turn & Release No Indicator	SSS
87104391	AR361/79D-PSS	Disabled Turn & Release No Indicator	PSS

ARRONE® 316 Escutcheons, Bathroom Turns & Indicators - 8mm

Concealed Fixed Escutcheons (8mm)

- Ø 52mm with 38mm fixing centres
- 8mm thick roses
- Stainless steel understructure
- Wood screw fixings supplied
- Polished & Satin Stainless Steel (PSS/SSS)

ID NO	PRODUCT REF	DESCRIPTION	FINISH
87104382	AR361/30-SSS	Blind Escutcheon (No Hole)	SSS
87104383	AR361/30-PSS	Blind Escutcheon (No Hole)	PSS
87100942	AR361/27-SSS	Euro Profile Escutcheon	SSS
87100943	AR361/27-PSS	Euro Profile Escutcheon	PSS
87100940	AR361/26-SSS	Lever Lock Escutcheon	SSS
87100941	AR361/26-PSS	Lever Lock Escutcheon	PSS
87100944	AR361/28-SSS	Oval Profile Escutcheon	SSS
87100945	AR361/28-PSS	Oval Profile Escutcheon	PSS



Euro



Lever Lock



Oval

Bathroom Turn & Indicators (8mm)

ID NO	PRODUCT REF	DESCRIPTION	FINISH
87100954	AR361/29-SSS	Indicator & Turn	SSS
87100955	AR361/29-PSS	Indicator & Turn	PSS
87104384	AR361/39-SSS	Turn & Release No Indicator	SSS
87104385	AR361/39-PSS	Turn & Release No Indicator	PSS



Bathroom Indicator & Turn

Bathroom Turn & Indicators (8mm)

ID NO	PRODUCT REF	DESCRIPTION	FINISH
87100956	AR361/29D-SSS	Disabled Indicator & Turn	SSS
87100957	AR361/29D-PSS	Disabled Indicator & Turn	PSS
87104386	AR361/39D-SSS	Disabled Turn & Release No Indicator	SSS
87104387	AR361/39D-PSS	Disabled Turn & Release No Indicator	PSS



Disabled Indicator & Turn

ARRONE® 316 Pull Handles

'D' Shape Pull Handles- Concealed Fix - ø19mm & ø22mm



- Available: 6mm or 8mm high rose - with stainless steel inner 4 point fixing
- Rose fixed to handle by 8mm x 35mm bolts allen key operated (supplied)
- Available: 150mm, 225mm & 300mm. 19mm & 22mm diameter Satin & Polished Stainless Steel (SSS/PSS)

ID NO	PRODUCT REF	DESCRIPTION	FINISH
87100910	AR3616/150-CF-SSS	19 x 150mm on 6mm Rose	SSS
87100911	AR3616/150-CF-PSS	19 x 150mm on 6mm Rose	PSS
87100912	AR3616/225-CF-SSS	19 x 225mm on 6mm Rose	SSS
87100913	AR3616/225-CF-PSS	19 x 225mm on 6mm Rose	PSS
87100914	AR3616/300-CF-SSS	19 x 300mm on 6mm Rose	SSS
87100915	AR3616/300-CF-PSS	19 x 300mm on 6mm Rose	PSS

- Stock codes listed are for 19mm diameter concealed fix pull handles with 6mm rose
- When ordering 6mm rose with 22mm diameter handle please amend stock code as follows:
AR3616/**22**/150/CF/SSS
- When Ordering 8mm rose with 19mm diameter handle please amend CF to read CF8 i.e. :
AR3616/150/**CF8**/SSS
- When ordering 8mm rose with 22mm diameter handle please amend stock code as follows:
AR3616/**22**/150/**CF8**/SSS

ARRONE® 316 Pull Handles

'D' Shape Pull Handles- Bolt Fix - ø19mm & ø22mm

- Supplied with two 8mm x 75mm countersunk bolts along with two clear flexible nylon washers for neck of pull handle
- Available: 150mm, 225mm & 300mm, 19mm & 22mm diameter Satin & Polished Stainless Steel (PSS/SSS)

ID NO	PRODUCT REF	DESCRIPTION	FINISH
87100916	AR3616/150-BF-SSS	19 x 150mm Bolt Fix	SSS
87100917	AR3616/150-BF-PSS	19 x 150mm Bolt Fix	PSS
87100918	AR3616/225-BF-SSS	19 x 225mm Bolt Fix	SSS
87100919	AR3616/225-BF-PSS	19 x 225mm Bolt Fix	PSS
87100920	AR3616/300-BF-SSS	19 x 300mm Bolt Fix	SSS
87100921	AR3616/300-BF-PSS	19 x 300mm Bolt Fix	PSS
87104514	AR3616/425-BF-SSS	19 x 425mm Bolt Fix	SSS
87104515	AR3616/425-BF-PSS	19 x 425mm Bolt Fix	PSS
87104518	AR3616/600-BF-SSS	19 x 600mm Bolt Fix	SSS
87104519	AR3616/600-BF-PSS	19 x 600mm Bolt Fix	PSS

- Stock codes listed are for 19mm diameter bolt fix pull handles
- When ordering 22mm diameter handles please amend stock code as follows:
AR3616/**22**/150/BF/SSS



ARRONE® 316 Pull Handles

'D' Shape Pull Handles Back to Back - ø19mm & ø22mm



- Supplied complete with two 8mm back to back bolts including four clear flexible nylon washers for neck of pull handle.
- Available 150mm, 225mm, 300mm 425mm & 600mm
19mm & 22mm diameter
Satin & Polished Stainless Steel (SSS/PSS)

ID NO	PRODUCT REF	DESCRIPTION	FINISH
87100922	AR3616/150-BB-SSS	150mm back-to-back fixing pull handle	SSS
87100923	AR3616/150-BB-PSS	150mm back-to-back fixing pull handle	PSS
87100924	AR3616/225-BB-SSS	225mm back-to-back fixing pull handle	SSS
87100925	AR3616/225-BB-PSS	225mm back-to-back fixing pull handle	PSS
87100926	AR3616/300-BB-SSS	300mm back-to-back fixing pull handle	SSS
87100927	AR3616/300-BB-PSS	300mm back-to-back fixing pull handle	PSS
87104516	AR3616/425-BB-SSS	425mm back-to-back fixing pull handle	SSS
87104517	AR3616/425-BB-PSS	425mm back-to-back fixing pull handle	PSS
87104520	AR3616/600-BB-SSS	600mm back-to-back fixing pull handle	SSS
87104521	AR3616/600-BB-PSS	600mm back-to-back fixing pull handle	PSS

- Stock codes listed are for 19mm diameter Back to Back fixing pull handles
- When ordering 22mm diameter handles please amend stock code as follows:
AR3616/**22**/150/BB/SSS

ARRONE® 316 Pull Handles

“T”-Bar Pull Handle Bolt Fix

ID NO	PRODUCT REF	DESCRIPTION	FINISH
87104300	AR3617/225-BF-SSS	Lever on rose 225mm centres	SSS
87104301	AR3617/225-BF-PSS	Lever on rose 225mm centres	PSS
87104302	AR3617/300-BF-SSS	Lever on rose 300mm centres	SSS
87104303	AR3617/300-BF-PSS	Lever on rose 300mm centres	PSS



AR3617/225-BF-SSS

“T”-Bar Pull Handle Back/Back


ID NO	PRODUCT REF	DESCRIPTION	FINISH
87104304	AR3617/225-BB-SSS	Lever on rose 225mm centres	SSS
87104305	AR3617/225-BB-PSS	Lever on rose 225mm centres	PSS
87104306	AR3617/300-BB-SSS	Lever on rose 300mm centres	SSS
87104307	AR3617/300-BB-PSS	Lever on rose 300mm centres	PSS






AR3617/225-BB-SSS

ARRONE® 316 Accessories

PRODUCT REF*	PRODUCT DESCRIPTION
AR306S	Cylinder pull for standard rim cylinder
AR306YP	Cylinder pull for euro profile cylinder
AR306U	Cylinder pull for union oval cylinder
AR317	Hat and coat hook
AR318	Buffered hat and coat hook
AR319	Single wardrobe hook
AR324A	75mm x 300mm finger plate square end
AR324B	75mm x 300mm finger plate radiused end
AR324C	75mm x 330mm finger plate square end
AR324P	75mm x 300mm finger plate sq end 'PUSH'
AR326A	250mm x 20mm flush bolt
AR326B	200mm x 20mm flush bolt
AR334A	Door stop 76mm concealed fix
AR334B	Door stop 76mm secret fixing
AR334E	Door stop face fix
AR334F	Door stop buffered torpedo shaped
AR323A	Circular flush pull ø 90mm
AR323B	Rectangular flush pull 102mm x 45mm
AR340-FF-(x)	Face fix door numerals No's 0-9
AR340-FF-(x)	Face fix letter (A,B,C,D)
AR340-CF-(x)	Concealed fix door numerals No's 0-9
AR340-CF-(x)	Concealed fix letter (A,B,C,D)

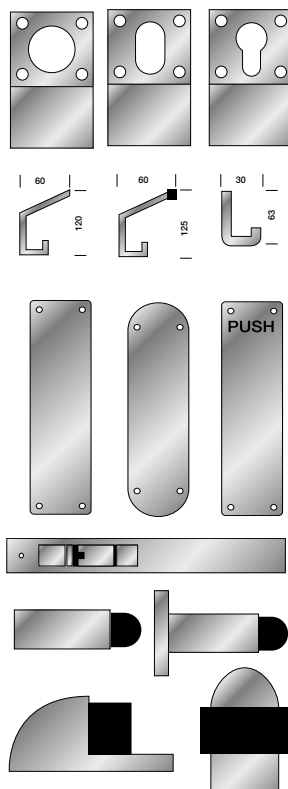

ARRONE® 316 Signs



PRODUCT REF*	PRODUCT DESCRIPTION
AR900	ø 76mm circular - 'Keep locked shut'
AR901	ø 76mm circular - 'Fire door keep locked'
AR902	ø 76mm circular - 'Fire door keep shut'
AR904	80mm square - 'Keep locked shut'
AR905	80mm square - 'Fire door keep shut'
AR906	80mm square - 'Fire door keep locked'
AR907	80mm square - 'Fire door keep locked shut'
AR903M	ø 76mm circular Male sign
AR903F	ø 76mm circular Female
AR903D	ø 76mm circular Disabled
AR903U	ø 76mm circular Unisex
AR308M	ø 100mm circular Male sign
AR308F	ø 100mm circular Female
AR308D	ø 100mm circular Disabled
AR308PULL	ø 76mm circular 'PULL'
AR308PUSH	ø 76mm circular 'PUSH'


* ALL ACCESSORIES ARE AVAILABLE IN EITHER SATIN STAINLESS STEEL (SSS) OR POLISHED STAINLESS STEEL (PSS).

Paris Series



Paris Series

HOPPE Paris Series – 138S/42K (Grade 3 BS EN1906: 2002)



Lever on Round Rose Ø 19mm

features

- Supplied with both bolt through and wood screw fixings – AR200FP (701742)
- Nylon understructure – 4 point fixing
- Supplied with HOPPE 105mm full profile spindle (630905)
- Half sets supplied with 8mm x 60mm half spindle – AR229 (630899)
- Sprung Lever suitable for 40mm to 47mm door thickness as standard
- Unsprung Lever suitable for 30mm to 49mm door thickness as standard
- Longer spindles available for thicker doors: See end of this section
- Suitable for 30min and 1 hour fire doors
- Suitable for use with ARRONE Plus escape locks
- LRV Rating: HOPPE F1 Finish LRV of 60, HOPPE F3 Finish LRV of 43.55

standards and certification



Quality & Performance: Successfully type tested to all the requirements of BS EN1906: 2002 Grade 3 (Test reports/certificates are available on request)
*Note: this classification only applies to the product marked with an asterisk

3	7	-	1*	1	4	0	A
---	---	---	----	---	---	---	---



Fire Safety: Included on a successful fire test to BS EN1634 Part1: 2002. Assessed for use on 30 min, & 1 hour fire doors.



Manufactured by an ISO 9000 Registered Company



Conformity Statement: Meets the dimensional recommendations of BS8300 and Approved Document "M"

ID NO	PRODUCT REF	DESCRIPTION	FINISH
2654497	AR200S/10-SP-SAA*	Sprung lever on round rose	SAA (F1)
2656345	AR200S/10-UN-SAA	Unsprung lever on round rose	SAA (F1)
2654500	AR200S/10-SP-GAA*	Sprung lever on round rose	GAA (F3)
87108206	AR200S/10-UN-ASSA-SAA	Unsprung lever on round rose to suit ASSA lock cases	SAA (F1)
2698650	AR200S/10-SP-HALF-LH-SAA	½ Set sprung lever on round rose – Left hand	SAA (F1)
87108212	AR200S/10-SP-HALF-RH-SAA	½ Set sprung lever on round rose – Right hand	SAA (F1)

HOPPE Paris Series – 138S/267U

Lever on Concealed Fix Rectangular Plate (sprung) Ø 19mm

features

- Supplied with 8mm x 105mm full profile spindle (630905)
- Supplied complete with bolt through fixings (701742)
- Suitable for 41mm to 50mm door thickness
- Longer spindles available for thicker doors: See end of this section
- LRV Rating: HOPPE F1 Finish LRV of 60, HOPPE F3 Finish LRV of 43.55

standards and certification



Quality & Performance: Successfully type tested to all the requirements of BS EN1906: 2002 Grade 3 (Test reports/certificates are available on request)


3	7	-	0	1	4	0	A
---	---	---	---	---	---	---	---




Manufactured by an ISO 9000 Registered Company



Conformity Statement: Meets the dimensional recommendations of BS8300 and Approved Document "M"



ID NO	PRODUCT REF	DESCRIPTION	FINISH
2655959	AR200S/11-SP-SAA	Sprung long plate latch furniture	SAA (F1)
2698511	AR200S/11-SP-GAA	Sprung long plate latch furniture	GAA (F3)
2655908	AR200S/12-SP-SAA	Sprung lock furniture 57mm centres	SAA (F1)
2698588	AR200S/12-SP-GAA	Sprung lock furniture 57mm centres	GAA (F3)
2655916	AR200S/13-SP-SAA	Sprung euro profile lock furniture 47.6mm centres	SAA (F1)
2698625	AR200S/13-SP-GAA	Sprung euro profile lock furniture 47.6mm centres	GAA (F3)
2655932	AR200S/13-SP-GU-SAA	Sprung euro profile lock furniture for Guardian 51mm centres	SAA (F1)
2655924	AR200S/13-SP-ASSA-SAA	Sprung euro profile lock furniture for ASSA 49.3mm centres	SAA (F1)
87108207	AR200S/13-SP-ESC-SAA	Sprung euro profile lock furniture for split follower lock (spindle 8504683) 47.6mm centres	SAA (F1)
2655941	AR200S/14-SP-SAA	Sprung oval profile lock furniture 48.5mm centres	SAA (F1)
2698684	AR200S/14-SP-GAA	Sprung oval profile lock furniture 48.5mm centres	GAA (F3)
2655975	AR200S/15-SP-SAA	Sprung bathroom furniture 57mm centres	SAA (F1)
2698553	AR200S/15-SP-GAA	Sprung bathroom furniture 57mm centres	GAA (F3)

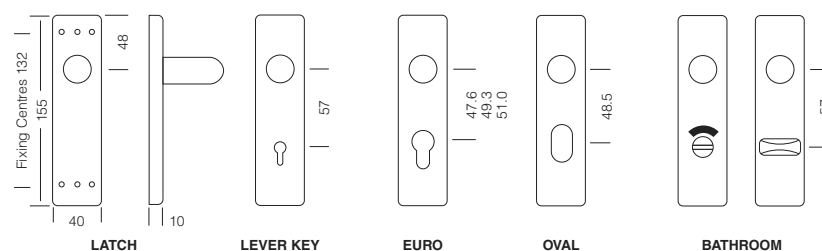

HOPPE Paris Series – 138S/304L


Lever on 160mm x 160mm Face Fix Plate (sprung & unsprung) Ø 19mm

features


- Supplied with 8mm x 105mm full profile spindle (630905)
- Suitable for 40mm to 60mm door thickness
- Longer spindles available for thicker doors: See end of this section
- Supplied with wood screws
- LRV Rating: HOPPE F1 Finish LRV of 60

standards and certification

 Manufactured by an ISO 9000 Registered Company



ID NO	PRODUCT REF	DESCRIPTION	FINISH
2656302	AR200S/16-SP-SAA	Sprung latch furniture	SAA (F1)
87108229	AR200S/16-UN-SAA	Unsprung latch furniture	SAA (F1)
2656142	AR200S/17-SP-SAA	Sprung lock furniture 57mm centres	SAA (F1)
87108230	AR200S/17-UN-SAA	UnSprung lock furniture 57mm centres	SAA (F1)
2656281	AR200S/18-SP-SAA	Sprung euro profile lock furniture 47.6mm centres	SAA (F1)
87108231	AR200S/18-UN-SAA	Unsprung euro profile lock furniture 47.6mm centres	SAA (F1)
87108205	AR200S/18-SP-GU-SAA	Sprung euro profile lock furniture for Guardian 51mm centres	SAA (F1)
87108210	AR200S/18-SP-ESC-SAA	Sprung euro profile lock furniture for split follower lock (spindle 8504683) 47.6mm centres	SAA (F1)
2656290	AR200S/19-SP-SAA	Sprung oval profile lock furniture 48.5mm centres	SAA (F1)
87108232	AR200S/19-UN-SAA	Unsprung oval profile lock furniture 48.5mm centres	SAA (F1)
2698781	AR200S/20-SP-LH-SAA	Sprung bathroom furniture – Left hand 57mm centres	SAA (F1)
2694675	AR200S/20-SP-RH-SAA	Sprung bathroom furniture – Right hand 57mm centres	SAA (F1)
87108233	AR200S/20-UN-LH-SAA	Unsprung bathroom furniture – Left hand 57mm centres	SAA (F1)
87108234	AR200S/20-UN-RH-SAA	Unsprung bathroom furniture – Right hand 57mm centres	SAA (F1)

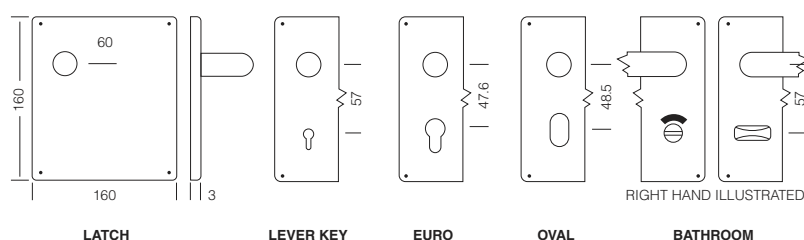

ARRONE® Mortice Lock Cases

Cylinder Mortice Sashlock Cases

standards and certification



Quality & Performance: Successfully type tested to all the requirements of BS EN12209: 2003

2	H	8	1	0	F	2	B	A	2	0
---	---	---	---	---	---	---	---	---	---	---



Manufactured by an ISO 9000 Registered Company



Fire Safety: Included in a successful fire test to BS EN1634 Part 1: 2000. For use on a 1 hour fire door





CE Marked: Declaration of conformity available on request

features

- Suitable for sprung and most unsprung door furniture
- Brass guided latchbolt (12mm projection)
- Easily reversed latchbolt without opening case
- Heavy duty brass deadbolt with hardened steel rollers (14mm projection)
- Suitable for bolt through furniture at 38mm centres
- 8mm heavy duty follower
- Suitable for a variety of bolt through armoured escutcheons
- 44/57mm backsets
- Polished brass or satin chrome finish forend and striking plate
- Polished stainless steel forend and striking plate available on request

ID NO	PRODUCT REF	DESCRIPTION	FINISH
87109110	AR8004-63-PB	63mm Euro Profile Sashlock Case	PB
87109111	AR8004-63-SC	63mm Euro Profile Sashlock Case	SC
87109112	AR8004-76-PB	76mm Euro Profile Sashlock Case	PB
87109113	AR8004-76-SC	76mm Euro Profile Sashlock Case	SC
87109114	AR8003-63-PB	63mm Oval Profile Sashlock Case	PB
87109115	AR8003-63-SC	63mm Oval Profile Sashlock Case	SC
87109116	AR8003-76-PB	76mm Oval Profile Sashlock Case	PB
87109117	AR8003-76-SC	76mm Oval Profile Sashlock Case	SC
8542896	AR729-13-PB	13mm Rebate Set	PB
8542903	AR729-13-SC	13mm Rebate Set	SC
8542910	AR729-25-PB	25mm Rebate Set	PB
8542917	AR729-25-SC	25mm Rebate Set	SC



ARRONE® Architectural Plus Locks & Latches

ARRONE® Mortice Lock Cases

Cylinder Mortice Deadlock Cases

standards and certification



Quality & Performance: Successfully type tested to all the requirements of BS EN12209: 2003

2	H	8	1	0	F	2	B	A	0	0
---	---	---	---	---	---	---	---	---	---	---



Manufactured by an ISO 9000 Registered Company




Fire Safety: Included in a successful fire test to BS EN1634 Part 1: 2000. For use on a 1 hour fire door



CE Marked: Declaration of conformity available on request

features

- Heavy duty brass deadbolt with hardened steel rollers (14mm projection)
- 44/57mm backsets
- Polished brass or satin chrome finish forend and striking plate
- Polished stainless steel forend and striking plate available on request

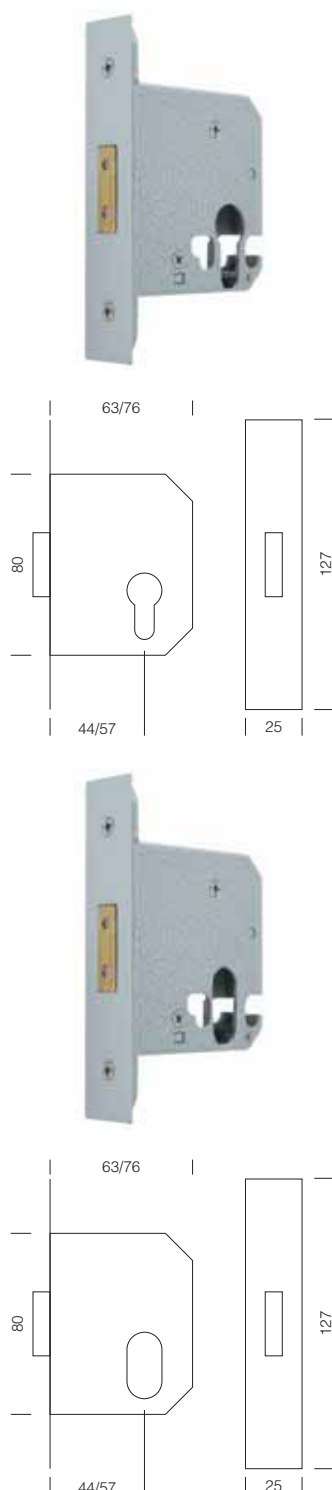

ID NO	PRODUCT REF	DESCRIPTION	FINISH
87109118	AR8006-63-PB	63mm Euro Profile Deadlock Case	PB
87109119	AR8006-63-SC	63mm Euro Profile Deadlock Case	SC
87109120	AR8006-76-PB	76mm Euro Profile Deadlock Case	PB
87109121	AR8006-76-SC	76mm Euro Profile Deadlock Case	SC
87109122	AR8005-63-PB	63mm Oval Profile Deadlock Case	PB
87109123	AR8005-63-SC	63mm Oval Profile Deadlock Case	SC
87109124	AR8005-76-PB	76mm Oval Profile Deadlock Case	PB
87109125	AR8005-76-SC	76mm Oval Profile Deadlock Case	SC
8542924	AR730-13-PB	13mm Rebate Set	PB
8542980	AR730-13-SC	13mm Rebate Set	SC
8542931	AR730-25-PB	25mm Rebate Set	PB
8542938	AR730-25-SC	25mm Rebate Set	SC

ARRONE® Mortice Lock Cases

Bathroom Locks (5mm or 8mm Follower)

standards and certification



Quality & Performance: Successfully type tested to all the requirements of BS EN12209: 2003

2	H	8	1	0	F	-	B	0	2	0
---	---	---	---	---	---	---	---	---	---	---



Manufactured by an ISO 9000 Registered Company




Fire Safety: Included in a successful fire test to BS EN1634 Part 1: 2000. For use on a 1 hour fire door



CE Marked: Declaration of conformity available on request

features

- Suitable for sprung and most unsprung door furniture
- Brass guided latchbolt (12mm projection)
- Easily reversed latchbolt without opening case
- Solid brass heavy duty deadbolt (14mm projection)
- Suitable for bolt through fixed lever furniture at 38mm centres
- 5mm or 8mm turn follower
- 44/57mm backsets
- Polished brass or satin chrome finish forend and striking plate
- Polished stainless steel forend and striking plate available on request



ID NO	PRODUCT REF	DESCRIPTION	FINISH
87109126	AR8023-63-5-PB	63mm Bathroom Sashlock 5mm Follower	PB
87109127	AR8023-63-5-SC	63mm Bathroom Sashlock 5mm Follower	SC
87109128	AR8023-76-5-PB	76mm Bathroom Sashlock 5mm Follower	PB
87109129	AR8023-76-5-SC	76mm Bathroom Sashlock 5mm Follower	SC
87109132	AR8023-63-8-PB	63mm Bathroom Sashlock 8mm Follower	PB
87109133	AR8023-63-8-SC	63mm Bathroom Sashlock 8mm Follower	SC
87109130	AR8023-76-8-PB	76mm Bathroom Sashlock 8mm Follower	PB
87109131	AR8023-76-8-SC	76mm Bathroom Sashlock 8mm Follower	SC

ARRONE® Architectural Plus Locks & Latches

ARRONE® Mortice Lock Cases

Cylinder Mortice Deadlock Cases

standards and certification



Quality & Performance: Successfully type tested to all the requirements of BS EN12209: 2003

2	H	8	1	0	F	2	B	A	0	0
---	---	---	---	---	---	---	---	---	---	---



Manufactured by an ISO 9000 Registered Company




Fire Safety: Included in a successful fire test to BS EN1634 Part 1: 2000. For use on a 1 hour fire door



CE Marked: Declaration of conformity available on request

features

- Heavy duty brass deadbolt with hardened steel rollers (14mm projection)
- 44/57mm backsets
- Polished brass or satin chrome finish forend and striking plate
- Polished stainless steel forend and striking plate available on request

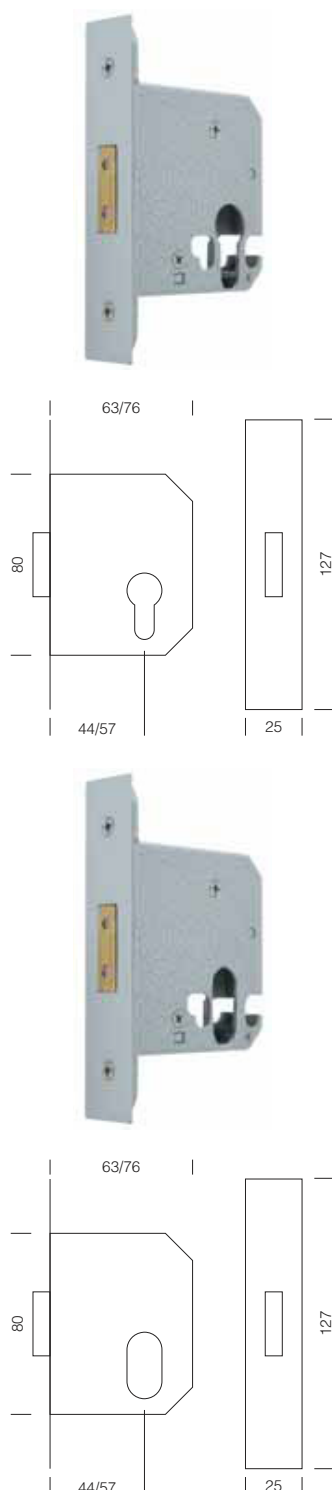

ID NO	PRODUCT REF	DESCRIPTION	FINISH
87109118	AR8006-63-PB	63mm Euro Profile Deadlock Case	PB
87109119	AR8006-63-SC	63mm Euro Profile Deadlock Case	SC
87109120	AR8006-76-PB	76mm Euro Profile Deadlock Case	PB
87109121	AR8006-76-SC	76mm Euro Profile Deadlock Case	SC
87109122	AR8005-63-PB	63mm Oval Profile Deadlock Case	PB
87109123	AR8005-63-SC	63mm Oval Profile Deadlock Case	SC
87109124	AR8005-76-PB	76mm Oval Profile Deadlock Case	PB
87109125	AR8005-76-SC	76mm Oval Profile Deadlock Case	SC
8542924	AR730-13-PB	13mm Rebate Set	PB
8542980	AR730-13-SC	13mm Rebate Set	SC
8542931	AR730-25-PB	25mm Rebate Set	PB
8542938	AR730-25-SC	25mm Rebate Set	SC

ARRONE® Mortice Lock Cases

Bathroom Locks (5mm or 8mm Follower)

standards and certification



Quality & Performance: Successfully type tested to all the requirements of BS EN12209: 2003

2	H	8	1	0	F	-	B	0	2	0
---	---	---	---	---	---	---	---	---	---	---



Manufactured by an ISO 9000 Registered Company




Fire Safety: Included in a successful fire test to BS EN1634 Part 1: 2000. For use on a 1 hour fire door



CE Marked: Declaration of conformity available on request

features

- Suitable for sprung and most unsprung door furniture
- Brass guided latchbolt (12mm projection)
- Easily reversed latchbolt without opening case
- Solid brass heavy duty deadbolt (14mm projection)
- Suitable for bolt through fixed lever furniture at 38mm centres
- 5mm or 8mm turn follower
- 44/57mm backsets
- Polished brass or satin chrome finish forend and striking plate
- Polished stainless steel forend and striking plate available on request



ID NO	PRODUCT REF	DESCRIPTION	FINISH
87109126	AR8023-63-5-PB	63mm Bathroom Sashlock 5mm Follower	PB
87109127	AR8023-63-5-SC	63mm Bathroom Sashlock 5mm Follower	SC
87109128	AR8023-76-5-PB	76mm Bathroom Sashlock 5mm Follower	PB
87109129	AR8023-76-5-SC	76mm Bathroom Sashlock 5mm Follower	SC
87109132	AR8023-63-8-PB	63mm Bathroom Sashlock 8mm Follower	PB
87109133	AR8023-63-8-SC	63mm Bathroom Sashlock 8mm Follower	SC
87109130	AR8023-76-8-PB	76mm Bathroom Sashlock 8mm Follower	PB
87109131	AR8023-76-8-SC	76mm Bathroom Sashlock 8mm Follower	SC

ARRONE® Architectural Plus Locks & Latches

ARRONE® Mortice Lock Cases



Bathroom Deadbolts (Square Case)

standards and certification



Manufactured by an ISO 9000 Registered Company




Fire Safety: Included in a successful fire test to BS EN1634 Part 1: 2000. For use on a 1 hour fire door



CE Marked: At the time of going to press this product was undergoing third party independent testing to BS EN12209: 2003, Once this standard is successfully achieved CE certification will be applied for.

features

- For use with Bathroom Indicators & Turns with 5mm spindle
- Brass deadbolt
- 44.5/57/82mm backsets
- Polished brass or stain chrome finish forend and striking plate



ID NO	PRODUCT REF	DESCRIPTION	FINISH
87109138	AR8031-63-PB	63mm Square Case Bathroom Deadbolt	PB
87109139	AR8031-63-SC	63mm Square Case Bathroom Deadbolt	SC
87109140	AR8031-76-PB	76mm Square Case Bathroom Deadbolt	PB
87109141	AR8031-76-SC	76mm Square Case Bathroom Deadbolt	SC
87109142	AR8031-100-PB	100mm Square Case Bathroom Deadbolt	PB
87109143	AR8031-100-SC	100mm Square Case Bathroom Deadbolt	SC



Bathroom Deadbolts (Tubular)

standards and certification



Manufactured by an ISO 9000 Registered Company




Fire Safety: Included in a successful fire test to BS EN1634 Part 1: 2000. For use on a 30 min & 1 hour fire door



CE Marked: At the time of going to press this product was undergoing third party independent testing to BS EN12209: 2003, Once this standard is successfully achieved CE certification will be applied for.

features

- For use with Bathroom Indicators & Turns with 5mm spindle
- Brass Deadbolt
- 57/82/107mm backsets
- Satin chrome and polished brass finish forends and striking plates supplied with each deadbolt



ID NO	PRODUCT REF	DESCRIPTION	FINISH
87101338	AR8018-76-SC/PB	76mm Heavy Duty Bathroom Deadbolt	SC/PB
87101341	AR8018-100-SC/PB	100mm Heavy Duty Bathroom Deadbolt	SC/PB
87101344	AR8018-128-SC/PB	128mm Heavy Duty Bathroom Deadbolt	SC/PB

ARRONE® DIN Standard Architectural Mortice Lock Cases

Euro Profile Mortice Sashlock Cases

standards and certification



Quality & Performance: Successfully type tested to all the requirements of BS EN12209: 2003

3	M	8	1*	0	F	2	B	A	2	0
---	---	---	----	---	---	---	---	---	---	---



Manufactured In Europe by an ISO 9000 Registered Company



Fire Safety: Included in a successful fire test to BS EN1634 Part 1: 2000. For use on a 1 hour fire door



CE Marked: Certificate: 1121-CPD-AG0067




Certifire Approved Product: Certificate CF530



Conformity Statement: Meets the dimensional recommendations of BS8300 and Approved Document "M"

features

- Case – mild steel/black powder coated finish, pierced to accept bolt through furniture and escutcheons with 38mm centres
- Backset – 60mm (other sizes to order)
- Centres – 72mm
- Latchbolt – nickel plated solid brass guided latchbolt, easily reversible without opening case
- Follower – 8mm zinc alloy follower (high copper content for additional strength) with spindle gripping feature
- Deadbolt – zinc alloy single throw with 20mm projection (high copper content for additional strength)
- Forend and striking plates available square or radius
- Suitable for sprung and most unsprung lever furniture
- Satin/polished stainless steel or polished brass forend and striking plate
- 5 year guarantee

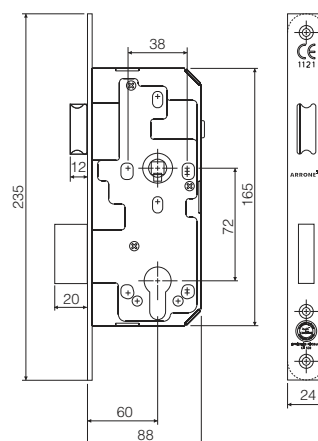

ID NO	PRODUCT REF	DESCRIPTION	FINISH
87107853	AR910-S-60-SSS	Mortice Sashlock Case (Square Forend)	SSS
87107854	AR910-S-60-PSS	Mortice Sashlock Case (Square Forend)	PSS
87107855	AR910-S-60-PB	Mortice Sashlock Case (Square Forend)	PB
87107856	AR910-R-60-SSS	Mortice Sashlock Case (Radiused Forend)	SSS
87107857	AR910-R-60-PSS	Mortice Sashlock Case (Radiused Forend)	PSS
87107858	AR910-R-60-PB	Mortice Sashlock Case (Radiused Forend)	PB
87107889	AR91-S-13-SSS	13mm Rebate Set for Square Forend Locks	SSS
87108045	AR91-S-13-PB	13mm Rebate Set for Square Forend Locks	PB

BWS

EURO CYLINDERS

SATIN NICKEL

LK106NP60	60mm SATIN NICKEL DOUBLE EURO CYLINDER
LK106NP70	70mm SATIN NICKEL DOUBLE EURO CYLINDER
LK106NP80	80mm SATIN NICKEL DOUBLE EURO CYLINDER
LK106NP30	30mm SATIN NICKEL DOUBLE EURO CYLINDER
LK106NP40	40mm SATIN NICKEL DOUBLE EURO CYLINDER
LK106NP35	35mm SATIN NICKEL DOUBLE EURO CYLINDER
LK106NP45	45mm SATIN NICKEL DOUBLE EURO CYLINDER
LK102NP70	70mm SATIN NICKEL CYLINDER & TURN
LK102NP80	80mm SATIN NICKEL CYLINDER & TURN
LK112NP45	45mm SATIN NICKEL HALF EURO CYLINDER

BRASS

LK106PB70	70mm BRASS DOUBLE EURO CYLINDER
LK102PB70	70mm BRASS CYLINDER & TURN

BWS MASTER KEYED EURO CYLINDERS

SATIN NICKEL

MK106NP70	70mm SN DOUBLE EURO CYL. UNDER M/KEY
MK102NP70	70mm SN CYLINDER & TURN UNDER M/KEY
MK102NP80	80mm SN CYLINDER & TURN UNDER M/KEY
MK112NP45	45mm SN HALF EURO CYL. UNDER M/KEY


BRASS

MK106PB70	70mm BRASS DOUBLE EURO CYL. UNDER M/KEY
MK102PB80	80mm BRASS CYLINDER & TURN UNDER M/KEY



ARRONE® Panic & Emergency Exit Hardware

ARRONE® AR888 Combination Unit for Double Rebated Doors



Application

- To be used on double rebated door sets with each single door leaf up to 2440mm high x 1220mm wide. SUITABLE FOR USE IN OPEN PUBLIC AREAS (in accordance with BS EN1125: 1997)

Standards and Certification



Quality & Performance: Successfully type tested to all the requirements of BS EN1125: 1997 + A1:2003

3	7	6	1	1	3	2	2	A
---	---	---	---	---	---	---	---	---



Fire Safety: Included in a successful fire test to BS EN1634 Part 1: 2000. For use on 30 min fire doors



CE Marked: Declaration of conformity available on request

Comprises

- AR880 single panic bolt
- AR882 reversible panic latch
- AR887 double door striking plate
- "Push Bar To Open" signage
- For full product details please refer to the individual product pages in this brochure.

Finishes

- Silver
- Gold
- Black
- Polished Brass
- Polished and Satin Stainless Steel
- RAL Colours to special order only

Guarantee

- Supported by a 2 Year Guarantee

ID NO	PRODUCT REF	DESCRIPTION	FINISH
8545563	AR888-SE	Combination Unit for Double Rebated Doors	Silver
8545570	AR888-GE	Combination Unit for Double Rebated Doors	Gold
8563784	AR888-SSS	Combination Unit for Double Rebated Doors	SSS
8563777	AR888-PB	Combination Unit for Double Rebated Doors	PB
8545577	AR888-BL	Combination Unit for Double Rebated Doors	Black
8563770	AR888-CH	Combination Unit for Double Rebated Doors	PSS

ARRONE® AR889 Combination Unit for Double Rebated Doors

Application

- Suitable for use only on double door sets in accordance with BS EN179. THIS UNIT SHOULD NOT BE USED IN OPEN PUBLIC AREAS

Standards and Certification



Quality & Performance: Successfully type tested to all the requirements of BS EN179 : 1998 + A1:2001

3	7	6	1	1	3	2	2	B
---	---	---	---	---	---	---	---	---



Fire Safety: Included in a successful fire test to BS EN1634 Part 1: 2000. For use on 30 min fire doors



CE Marked: Declaration of conformity available on request

Comprises

- AR880 single panic bolt
- AR883 reversible push pad
- AR887 double door striking plate
- "Push Bar To Open" signage
- For full product details please refer to the individual product pages in this brochure.


Finishes

- Silver
- Satin Stainless Steel
- RAL Colours to special order only

Guarantee

- Supported by a 2 Year Guarantee

ID NO	PRODUCT REF	DESCRIPTION	FINISH
8545584	AR889-SE	Combination Unit for Double Rebated Doors	Silver
87100222	AR889-SSS	Combination Unit for Double Rebated Doors	SSS



ARRONE® Panic & Emergency Exit Hardware

ARRONE® AR884 Push Pad Single Panic Bolt



Application

- Suitable for single doors up to 2440mm high.
- Please Note: AR884 push pad panic bolt SHOULD NOT BE USED IN OPEN PUBLIC AREAS (in accordance with BS EN179)

Standards and Certification



Quality & Performance: Successfully type tested to all the requirements of BS EN179 : 1998 + A1:2002

3	7	6	1	1	3	4	2	B
---	---	---	---	---	---	---	---	---



Fire Safety: Included in a successful fire test to BS EN1634 Part 1: 2000. For use on 30 min fire doors



CE Marked: Declaration of conformity available on request

Standard Features

- Maintains all of the feature benefits of the AR880 Single Panic Bolt with the exception of the Cross Bar Operator which is replaced with a Push Pad
- Recommended as a replacement for AR883 when additional security is required
- "Push Pad To Open" signage supplied

Finishes

- Silver
- Gold
- Black
- Polished Brass
- Polished and Satin Stainless Steel
- RAL Colours to special order only

Guarantee

- Supported by a 2 Year Guarantee

ID NO	PRODUCT REF	DESCRIPTION	FINISH
8511130	AR884-SE	Push Pad Single Panic Bolt	Silver
8511102	AR884-GE	Push Pad Single Panic Bolt	Gold
8511137	AR884-SSS	Push Pad Single Panic Bolt	SSS
8511109	AR884-PB	Push Pad Single Panic Bolt	PB
8511088	AR884-BL	Push Pad Single Panic Bolt	Black
8511095	AR884-CH	Push Pad Single Panic Bolt	PSS

ARRONE® AR883 Reversible Push Pad

Application

- Suitable for single doors or first opening leaf of double doors with rebated meeting stiles.
- Please Note: AR883 reversible push pad **SHOULD NOT BE USED IN OPEN PUBLIC AREAS** (in accordance with BS EN179)

Standards and Certification



Quality & Performance: Successfully type tested to all the requirements of BS EN179 : 1998 + A1:2003

3	7	6	1	1	3	4	2	B
---	---	---	---	---	---	---	---	---



Fire Safety: Included in a successful fire test to BS EN1634 Part 1: 2000. For use on 30 min fire doors



CE Marked: Declaration of conformity available on request

Standard Features


- Single point locking
- Diecast control boxes
- Follower on main box for use with AR885 locking attachment
- Reversible
- "Push Pad To Open" signage supplied
- Suitable for any door width

Finishes

- Silver
- Gold
- Black
- Polished Brass,
- Polished and Satin Stainless
- Steel/Chrome
- RAL Colours to special order only

Guarantee

- Supported by a 2 Year Guarantee



ID NO	PRODUCT REF	DESCRIPTION	FINISH
8511060	AR883-SE	Reversible Push Pad	Silver
8511011	AR883-GE	Reversible Push Pad	Gold
8511067	AR883-SSS	Reversible Push Pad	SSS
8511025	AR883-PB	Reversible Push Pad	PB
8510962	AR883-BL	Reversible Push Pad	Black
8510969	AR883-CH	Reversible Push Pad	PSS

ARRONE® Panic & Emergency Exit Hardware

ARRONE® AR885 & AR885K External Locking Attachments



Application

- Suitable for use with all units of the ARRONE® Panic & Emergency Exit Hardware range and also other manufacturers ranges.

Standards and Certification



Fire Safety: Included in a successful fire test to BS EN1634 Part 1: 2000. For use on 30 min fire doors

- There are no current EN standards or CE marking requirement for External Locking Attachments to operate Panic & Emergency Exit Hardware Devices, however both the AR885 & AR885K have been successfully third party tested when fitted with Panic & Emergency Exit Hardware

Standard Features

- Back to back fixing with the internal device prevents unsightly drill holes only when fitted with ARRONE® Panic & Emergency Exit Hardware
- Diecast control boxes
- AR885 lift up pad handle designed to snap when excessive force is applied
- AR885K unique hexagonal knob design
- Both models available without cylinder. (Order AR886 or AR886K)
- Supplied with 8mm x 90mm spindle

Finishes

- Silver
- Satin Stainless Steel
- Gold
- Black
- Please note metallic finishes are not recommended for external use, but are available to special order..

Guarantee

- Supported by a 2 Year Guarantee

ID NO	PRODUCT REF	DESCRIPTION	FINISH
8511158	AR885-SE	Pad Type Locking Attachment	Silver
8511151	AR885-GE	Pad Type Locking Attachment	Gold
8545647	AR885-SSS	Pad Type Locking Attachment	SSS
8511144	AR885-BL	Pad Type Locking Attachment	Black
87100223	AR885K-SE	Knob Type Locking Attachment	Silver
87100224	AR885K-GE	Knob Type Locking Attachment	Gold
87100225	AR885K-BL	Knob Type Locking Attachment	Black
8511179	AR886-SE	Pad Type Lock Attachment - No Cylinder	Silver
8511172	AR886-GE	Pad Type Lock Attachment - No Cylinder	Gold
87105006	AR886-SSS	Pad Type Lock Attachment - No Cylinder	SSS
8511165	AR886-BL	Pad Type Lock Attachment - No Cylinder	Black
87100226	AR886K-SE	Knob Type Lock Attachment - No Cylinder	Silver
87100227	AR886K-GE	Knob Type Lock Attachment - No Cylinder	Gold
87100228	AR886K-BL	Knob Type Lock Attachment - No Cylinder	Black



Electronics & Access Control

Electronic Access Control Kits 524-526



Stand-alone Keypads & Readers 527-528



ARRONE® Electric Release 529-530



Magnets & Accessories 531-535



Electric Locks 536-537



Accessories 538-540



Videx Module Readers 541



VIDEX Audio & Video Kits 542-545



Hotel Locking 546



University Locking 547



Online Access Control 548



SecuSignal® 549



A comprehensive range of both electronic and mechanical products are now readily available from stock and support by our next day delivery service.

The range features product manufactured by a number of companies who's brand names are easily recognised within the market.

A full technical support service is also available both internally from our sales team. Electrical and mechanical access control partners.



Openers & Closers

Spain's leading manufacturer of electric releases, magnets.



KABA SIMPLEX & E-PLEX

Featuring the popular and proven range of Simplex Unican mechanical, digital locking products.



CDV


CDV Group is a manufacturer of Access Control products.



Videx

Videx Security has been established since 1985 as a market leader in door entry and access control systems.

ARRONE® Electronic Door Kit - 1

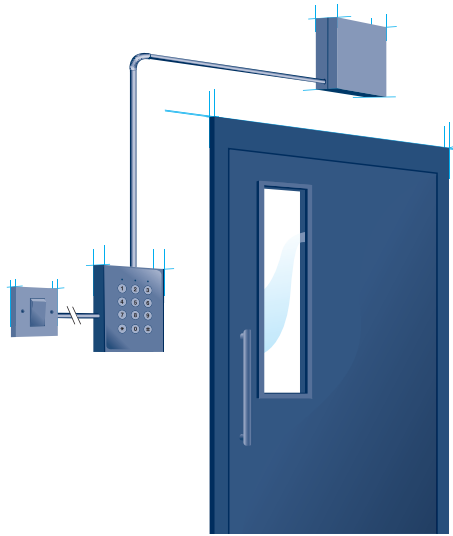

Stand-alone Vandal Resistant Keypad With Electric Release Kit

features

- Easy installation
- Easy programming
- LED indicators
- User definable lock times
- Lock strike relays (minimum 2A)
- Keypad (backlit)
- Housing - Robust diecast zinc alloy
- No. of users - 99
- Access Modes - PIN only
- IP Rating - IP67
- Relays - 1 x 2A, 1 x transistor
- Output Modes - 0-99 secs or latched
- Inputs - 1 x Request To Exit
- Audible Buzzer
- Cable Supplied - 1 metre
- Tamper Provision
- Dimensions (mm) - 116 x 86 x 22
- Operating Voltage - 12V/24V AC/DC
- Power Consumption - 10-60mA
- Operating Temp -25°C to +70°C



Keypad Stand-alone Vandal
Resistant IP67
AR/E-C6010



Rim/Mortice Electric Release 300kg
Fail locked 12V AC/DC
AR/E-R2010-GAE



Power Supply 12V DC 1 Amp with
Battery Charger in metal box
AR/E-PSU12/1S



Egress Button Surface Fix Plastic
AR/E-C6021

ID NO	PRODUCT REF	DESCRIPTION
87105901	AR/E-KIT001	Complete Door Kit (comprises of the following items)
Consisting of		
87105789	AR/E-C6010	Keypad Stand-alone Vandal Resistant IP67
87105596	AR/E-R2010-GAE	Rim/Mortice Electric Release 300kg Fail locked 12V AC/DC
87108116	AR/E-PSU12/1S	Power Supply 12V DC 1 Amp with Battery Charger in metal box
87105784	AR/E-C6021	Egress Button Surface Fix Plastic

Electronic Access Control Kits

ARRONE® Electronic Door Kit - 2



Stand-alone Proximity
Programmable Controller
AR/E-C6016



Proximity Reader Only
AR/E-C6012



Proximity Card (Pack of 10 Cards)
AR/E-C6015




Power Supply 12V DC 1 Amp with
Battery Charger in metal box
AR/E-PSU12/1S



Egress Button Surface Fix Plastic
AR/E-C6021



Rim/Mortice Electric Release AC/
DC 300kg Fail locked Kit
AR/E-R2010-GAE

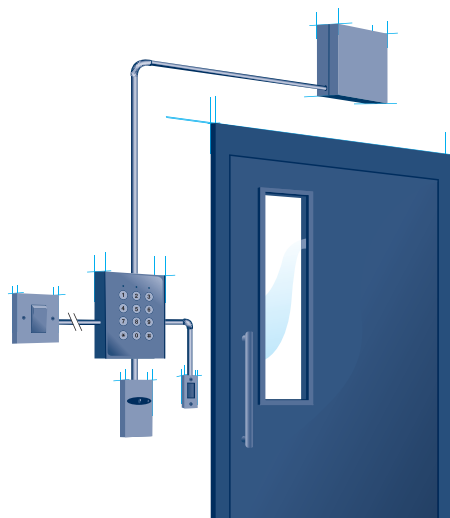


Stand-alone Proximity Reader With Electric Release Kit

features

- Easy installation
- Easy programming
- LED indicators
- User definable lock times
- Lock strike relays (minimum 2A)
- Keypad (backlit)
- Housing - Diecast aluminium alloy
- No. of users - 99
- Access Modes - PIN only
- IP Rating - IP65
- Relays - 1 x 10A, 1 x 2A
- Output Modes - 0-99 secs or latched
- Inputs - 2 x Request To Exit
- Audible Buzzer
- Tamper Provision
- Operating Voltage - 12V/24V AC/DC
- Power Consumption - 10-60mA
- Cable Length - 1 metre
- Operating Temp -25°C to +75°C

ID NO	PRODUCT REF	DESCRIPTION
87105902	AR/E-KIT002	Complete Door Kit (comprises of the following items)
Consisting of		
87105795	AR/E-C6016	Stand-alone Proximity Programmable Controller
87105791	AR/E-C6012	Proximity Reader Only
87105794	AR/E-C6015	Proximity Card (Pack of 10 Cards)
87108116	AR/E-PSU12/1S	Power Supply 12V DC 1 Amp with Battery Charger in metal box
87105784	AR/E-C6021	Egress Button Surface Fix Plastic
87105596	AR/E-R2010-GAE	Rim/Mortice Electric Release AC/DC 300kg Fail locked Kit

ARRONE® Electronic Door Kit - 3

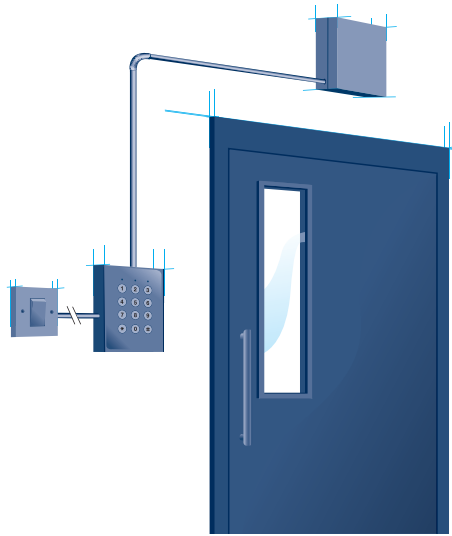

Stand-alone Vandal Resistant Keypad / Magnet Kit

features

- Easy installation
- Easy programming
- LED indicators
- User definable lock times
- Lock strike relays (minimum 2A)
- Tamper facility
- Keypad (backlit)
- Housing - Robust diecast zinc alloy
- No. of users - 99
- Access Modes - PIN only
- IP Rating - IP67
- Relays - 1 x 2A, 1 x transistor
- Output Modes - 0-99 secs or latched
- Inputs - 1 x RTE
- Audible Buzzer
- Cable Supplied - 1 metre
- Tamper Provision
- Dimensions (mm) - 116 x 86 x 22
- Operating Voltage - 12V/24V AC/DC
- Power Consumption - 10-60mA
- Operating Temp -25°C to +70°C

Magnet Information

- Slimline Magnet 12/24V DC 300kg for inward opening doors
- Outward opening door order Z&L Bracket - ID Code: 87105906



Keypad Stand-alone Vandal Resistant
AR/E-C6010



Power Supply 12V DC 1 Amp with
Battery Charger in metal box
AR/E-PSU12/1S



Slimline Magnet 12/24V DC 300kg
AR/E-M7010



Emergency Break Glass Single Pole
AR/E-C6022



Egress Button Surface Fix Plastic
AR/E-C6021

ID NO	PRODUCT REF	DESCRIPTION
87105903	AR/E-KIT003	Complete Door Kit (comprises of the following items)
Consisting of		
87105789	AR/E-C6010	Keypad Stand-alone Vandal Resistant
87108116	AR/E-PSU12/1S	Power Supply 12V DC 1 Amp with Battery Charger in metal box
87105799	AR/E-M7010	Slimline Magnet 12/24V DC 300kg
87105785	AR/E-C6022	Emergency Break Glass Single Pole
87105784	AR/E-C6021	Egress Button Surface Fix Plastic

Electronic Access Control Kits

ARRONE® Electronic Door Kit - 4



Stand-alone Proximity
Programmable Controller
AR/E-C6016



Proximity Reader Only
AR/E-C6012



Power Supply 12V DC 1 Amp with
Battery Charger in Metal Box
AR/E-PSU12/1S



Slimline Magnet 12/24V DC 300kg
AR/E-M7010




Proximity Card (Pack of 10 cards)
AR/E-C6015



Emergency Break Glass Single Pole
AR/E-C6022



Egress Button Surface Fix Plastic
AR/E-C6021

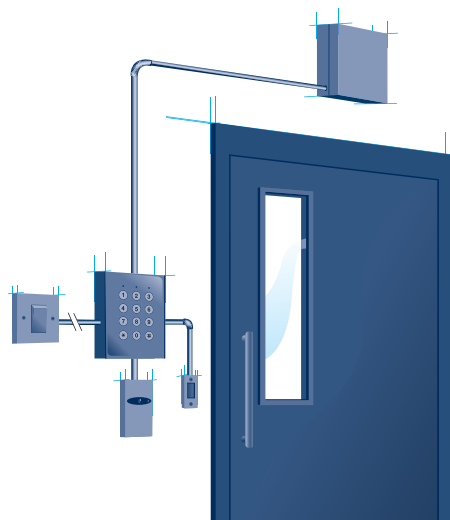

Stand-alone Vandal Resistant Keypad / Magnet Kit

features

- Easy installation
- Easy programming
- LED indicators
- User definable lock times
- Lock strike relays (minimum 2A)
- Keypad (backlit)
- Housing - Diecast aluminium alloy
- No. of users - 99
- Access Modes - PIN only
- Cable Length - 1 metre
- IP Rating - IP65
- Relays - 1 x 10A, 1 x 2A
- Output Modes - 0-99 secs or latched
- Inputs - 2 x Request To Exit
- Audible Buzzer
- Tamper Provision
- Operating Voltage - 12V/24V AC/DC
- Power Consumption - 10-60mA

Magnet Information

- Slimline Magnet 12/24V DC 300kg for inward opening doors
- Outward opening door order Z&L Bracket (ID Code: 87105906)

ID NO	PRODUCT REF	DESCRIPTION
87105904	AR/E-KIT004	Complete Door Kit (comprises of the following items)
Consisting of		
87105795	AR/E-C6016	Stand-alone Proximity Programmable Controller
87105791	AR/E-C6012	Proximity Reader Only
87105794	AR/E-C6015	Proximity Card (Pack of 10 cards)
87105799	AR/E-M7010	Slimline Magnet 12/24V DC 300kg
87105785	AR/E-C6022	Emergency Break Glass Single Pole
87105784	AR/E-C6021	Egress Button Surface Fix Plastic
87108116	AR/E-PSU12/1S	Power Supply 12V DC 1 Amp with Battery Charger in Metal Box

ARRONE® Stand-alone Keypads & Readers

Stand-alone Proximity Controller & Readers

Intelligent proximity readers offer a reliable and secure access control solution to stand-alone applications.

AR/E-C6010 - Stand-alone Vandal Resistant Keypad

- Vandal Resistant
- Robust Die Cast Zinc Alloy Housing
- IP Rating - IP67
- Dimensions (mm) 116 x 86 x 22
- Power Consumption 10-25mA
- LED Indicators
- Easy to Install
- Keypad (backlit)
- No. of users - 99
- Access Modes - PIN only
- Relays - 1 x 2A, 1 x transistor
- Output Modes - 0-99 secs or latched
- Inputs - 1 x Request To Exit
- Audible Buzzer
- Cable Supplied - 1 metre
- Tamper Provision
- Operating Voltage - 12V/24V AC/DC
- Operating Temp -25°C to +70°C
- Operating Humidity - 0 to 95%



Keypad Standalone Vandal Resistant IP67
AR/E-C6010



Stand-alone Proximity Programmable Controller
AR/E-C6016



Proximity Reader only
AR/E-C6012



Proximity Key Fob
AR/E-C6014



Proximity Card
AR/E-C6015

ID NO	PRODUCT REF	DESCRIPTION
87105789	AR/E-C6010	Keypad Standalone Vandal Resistant IP67
87105795	AR/E-C6016	Stand-alone Proximity Programmable Controller
87105791	AR/E-C6012	Proximity Reader only
87105793	AR/E-C6014	Proximity Key Fob (Single)
87105794	AR/E-C6015	Proximity Card (Pack of 10)

Stand-alone Keypads & Readers

ARRONE® Stand-alone Keypads & Readers



Economy Stand-alone Keypad
AR/E-PROMI-ECO

ARRONE® AR/E-PROMI-ECO

The AR/E-PROMI-ECO is an economy self contained keypad. Programmed via a master code, the unit has LED and audible indication, with exit button input and timed relay output.

features

- Users: 100
- Voltage: 12V AC/DC
- Current: 80mA
- Dimensions: 143 x 78 x 28mm
- Environmental: IP54

ID NO	PRODUCT REF	DESCRIPTION
87108081	AR/E-PROMI-ECO	Economy Stand-alone Keypad 100 Users



Stainless Steel Keypad
AR/E-C2R-S

ARRONE® AR/E-C2R-S Stainless Steel Keypad

The AR/E-C2R-S is an entry level stainless steel keypad. It has fluorescent keys to assist in darkness, and accepts 8 users with 2 x output relays. Programming is via a master code.

features

- Users: 8
- Finish: Stainless Steel
- Voltage: 12V AC/DC
- Current: 80mA
- Dimensions: 114 x 62 x 37mm
- Environmental: IP61

ID NO	PRODUCT REF	DESCRIPTION
87108091	AR/E-C2R-S	Stainless Steel Keypad 8 Users



Stand-alone Keypad Vandal Resistant
AR/E-GALEO


ARRONE® AR/E-GALEO

The GALEO has blue back-lit keys. Vandal-resistant with 100 users, for high security applications.

features

- Users: 100
- Finish: Polished Cast Aluminium
- Voltage: 12-48V DC, 12-24V AC
- Current: 80mA
- Dimensions: 110 x 75 x 15mm
- Environmental: IP67

ID NO	PRODUCT REF	DESCRIPTION
87108088	AR/E-GALEO	Stand-alone Keypad Vandal Resistant 100 Users

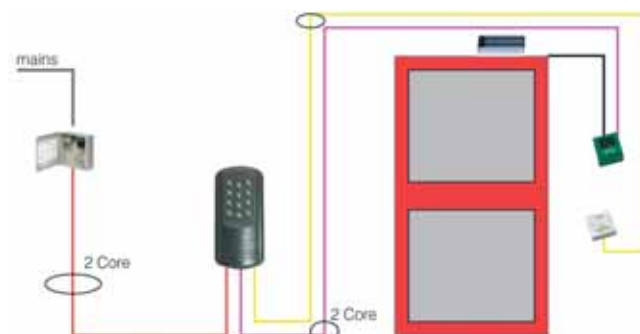


ARRONE® Electric Release

Electric Release Kits

Electric release kits offer value and performance for low to medium security. Each kit comprises of the release body, a surface rim case and mortice plate. Every release has a suppressor fitted internally as standard, this prevents return EMF (Electrical Motive Force) and damage to control equipment.

ID NO	PRODUCT REF	DESCRIPTION
87105596	AR/E-R2010-GAE	Fail locked kit, 12V AC/DC Kit
87108102	AR/E-GAEI	Failed unlocked kit, 12V DC Kit
87108101	AR/E-GAER	Fail locked, adjustable jaw, 12V AC/DC Kit
87108103	AR/E-GAERI	Failed unlocked, adjustable jaw, 12V DC Kit

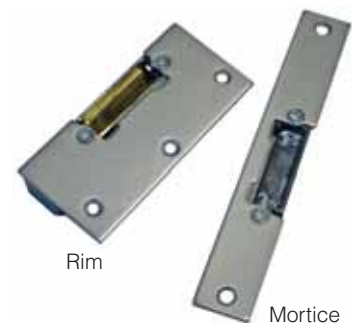

AR/E-R2010-GAE - AR/E-GAEI
Electric Release Kits

Electric Release Housings

A range of surface housings and faceplates for different applications are compatible with the above Electric Releases.

ID NO	PRODUCT REF	DESCRIPTION
87108104	AR/E-GAO	Satin Brass surface rim housing
87108105	AR/E-T204	Grey rim housing
87108106	AR/E-T205	Polished chrome rim housing
87108107	AR/E-T208	Polished brass rim housing
87108108	AR/E-F208G	Grey rim case for outward opening door




AR/E-T205 AR/E-T204 AR/E-GAO
Polished Grey Brass
Chrome
Electric Release Housings

Electric Release Housings & Face Plates

A range of accessories compatible with the above Electric Releases to suite all types of doors.

ID NO	PRODUCT REF	DESCRIPTION
87108113	AR/E-CPDT	Microswitch strike for deadbolt
87108109	AR/E-T	130mm stainless steel faceplate
87108110	AR/E-TG	158mm stainless steel faceplate
87108111	AR/E-L	Stainless faceplate with deadbolt keep
87108112	AR/E-ATP	Anti-thrust plate, stainless steel

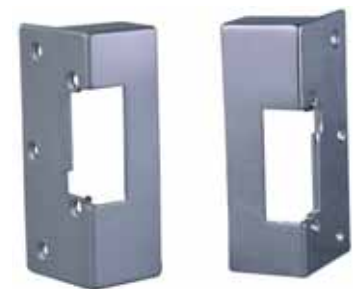

Electric Release Housing
Stainless Steel
AR/E-F208G



AR/E-TG
Electric Release Face Plates


ARRONE® Electric Release



ANSI Mortice Electric Release Fail locked/Fail Unlocked, long/Short Face Plate included
AR/E-R2024



ANSI Rim Electric Release Fail locked/Fail Unlocked
AR/E-R2026



Deadbolt Release
AR/E-R2029 - AR/E-R2030

ANSI Electric Releases long & Short Stainless Steel Faceplates

ANSI (American National Standard Institute) Electric Releases can be used on timber doors with narrow profile mortice sashlocks / nightlatches. They can also be used in conjunction with standard mortice sash locks with a bolt throw of up to 16mm.

features

- Fail Locked / Fail Unlocked Selector
- Stainless Steel Face Plate
- Holding Force 1000kg
- Consumption 250mA

ID NO	PRODUCT REF	DESCRIPTION
87105912	AR/E-R2024	ANSI Mortice Electric Release Fail locked/Fail Unlocked, long/Short Face Plate included 12V DC
87105914	AR/E-R2026	ANSI Rim Electric Release Fail locked/Fail Unlocked included - long/Short Plate 12V DC
87105915	AR/E-R2027	50mm Lip Extension
87105916	AR/E-R2028	25mm Lip Extension

Electric Release For Mortice Dead Lock


Electric releases for deadlocks in ANSI standard Electric Release, they are available in either fail locked or fail unlocked. The deadlock releases include monitoring as standard.

features

- Fail Locked / Fail Unlocked Selector
- Stainless Steel Face Plate
- Holding Force 1000kg
- Consumption 250mA

ID NO	PRODUCT REF	DESCRIPTION
87105917	AR/E-R2029	Deadbolt release, fail unlocked, 12V DC
87105918	AR/E-R2030	Deadbolt release, fail locked, 12V DC

ARRONE® Magnets

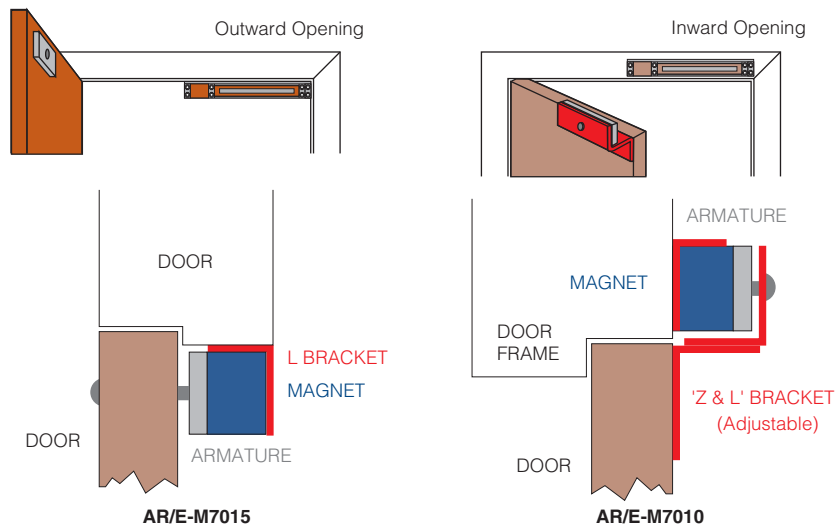

UK Compatible Magnets

features

- Holding Force up to 500kg
- 12V or 24V DC site selectable

ID NO	PRODUCT REF	DESCRIPTION
87108881	AR/E-B1001	Contract Slimline Magnet 12/24V DC 300kg
87105799	AR/E-M7010	Slimline Magnet 12/24V DC 300kg
87108082	AR/E-ECS5000M	Slimline Magnet 12/24V DC 300kg Monitored
87105800	AR/E-M7011	Double Slimline Magnet 12/24V DC 300kg
87108083	AR/E-SD300M	Double Slimline Magnet 12/24V DC 300kg Monitored
87108130	AR/E-180	Micro Magnet 180kg 12/24V DC 168 x 33 x 20mm
87108128	AR/E-ES400	External Stainless Steel Magnet IP67 12/24V DC 400kg
87108129	AR/E-ES500	External Stainless Steel Magnet IP67 12/24V DC 500kg
87108132	AR/E-ECS8000	Standard Magnet 12/24V DC 500kg

Fixing Brackets & Glass Housings

ID NO	PRODUCT REF	DESCRIPTION
87105905	AR/E-M7015	L Bracket for use ES500 and ECS8000 500kg magnet
87105906	AR/E-M7016	Z&L Bracket for use with ES500 and ECS8000 500kg magnet
87108134	AR/E-300/500Z	Z bracket for AR/E-M7010 / AR/E-ECS5000M
87108135	AR/E-300AS	Surface armature housing for AR/E-M7010 / AR/E-ECS5000M
87108136	AR/E-500AS	Surface armature housing for AR/E-ECS8000
87108137	AR/E-UBK-U	Z armature glass housing for AR/E-ECS5000M / AR/E-M7010
87108138	AR/E-UBK-P	L Bracket glass housing for AR/E-M7010 / AR/E-ECS5000M
87108131	AR/E-180Z	Micro Magnet Z Bracket for AR/E-180
87109440	AR/E-300ZL	Z&L bracket for AR/E-7010, ECS5000M, M7011, SD300M, ES400



Slimline Magnet 12/24V DC 300kg
AR/E-B1001 - AR/E-M7010 0
AR/E-ECS5000M



Double Slimline Magnet 12/24V DC 300kg
AR/E-M7011



Micro Magnet 180kg 168 x 33 x 20mm 12/24V DC
AR/E-180



External Stainless Steel Magnet
IP67 400kg 12/24V DC
AR/E-ES400 - AR/E-ES500



Standard Magnet 500kg 12/24V DC
AR/E-ECS8000




L Bracket
AR/E-M7015



Z&L Bracket
AR/E-300ZL

Magnets & Accessories

ARRONE® Magnets



Architectural Housings

Architectural Mortice Magnet Housing

Architectural Mortice Magnet housings for single or double door applications. Fitted horizontally across the transom door header.

NB: Electromagnets Are Not included.

Please see below for Mortice Magnets.

ID NO	PRODUCT REF	DESCRIPTION
87108550	AR/E-AH38/1	1 metre housing, 1 end cut out (1 x Magnet) Aluminium Finish
87108551	AR/E-AH38/2-1	2 metre housing, 1 end cut out (1 x Magnet) Aluminium Finish
87108552	AR/E-AH38/2-2	2 metre housing, 2 centre cut outs (2 x Magnet) Aluminium Finish
87108553	AR/E-AH38/2-2V	2 metre housing, 2 end cut outs (2 x Magnet) Aluminium Finish



Mortice Magnet 12/24V DC
AR/E-M300

Mortice Magnet

Mortice Magnets for the above housing with holding force of 300kg.

- Voltage: 12/24V DC
- Finish: Aluminium
- Current: 630mA @ 12V DC -
- 313mA @ 24V DC
- Dimensions: 215 x 35 x 25mm

ID NO	PRODUCT REF	DESCRIPTION
87108873	AR/E-M300	Mortice Magnet 12/24V DC to suit housing



Token



PCB

RF Magnet

The RF (Radio Frequency) - Magnet is a new and innovative solution for single door access control in a simple form. The PCB within the magnet incorporates a 10 x user radio receiver.

The unit is supplied in two forms, as the PCB only for retrofit, or as a kit.


The magnet can also be operated in the conventional way, by means of a keypad/ access control device.



RF Magnet

ID NO	PRODUCT REF	DESCRIPTION
87108139	AR/E-RF-MAGNET-KIT1	Single door access control in KIT form including magnet a 10 x user radio receiver + 2 Transmitters
87108140	AR/E-RF-MAGNET-PCB	PCB only

ARRONE® Magnets by Openers and Closers®

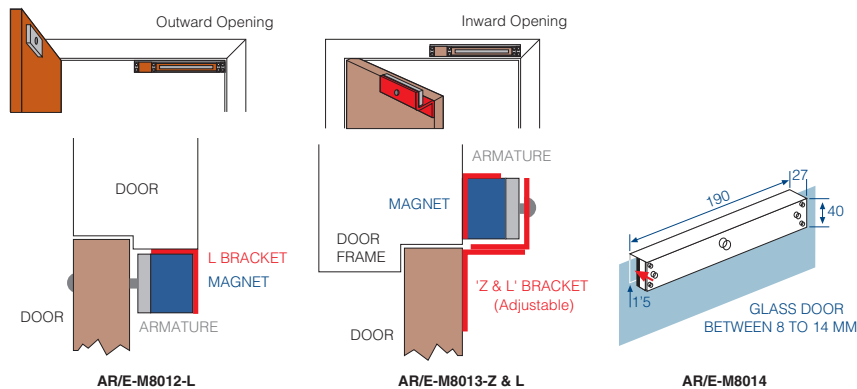

Mini Magnets

features

- Holding Force: 250kg
- High sensitivity: Monitors and warns of failure to close and impossible to cheat the Magnet
- Proven Quality: Both O&C Magnets and Shear Magnets undergo quality control and come with a 5-year warranty and holding force test certificate
- 5 year warranty

technical information

- Dual Voltage 12V DC/24V DC
- Door Closed Indicator
- Incorrectly Closed Indicator
- Power Failure Indicator
- Reed Switch
- IP65

ID NO	PRODUCT REF	DESCRIPTION
87105615	AR/E-M8017	Mini Magnet Rim 250kg 12/24V DC
87105609	AR/E-M8011	Mini Magnet Square Ended 250kg 12/24V DC
87105616	AR/E-M8018	Mini Magnet External Waterproof 250kg 12/24V DC
87105610	AR/E-M8012-L	L Bracket for M8010/M8011
87105611	AR/E-M8013-Z & L	Z&L Bracket for M8010/M8011
87105612	AR/E-M8014	Glass Door Adjustable Bracket



ARRONE® Magnets by Openers and Closers®



Mortice Shearlock 12V DC 2 Amp
AR/E-M8016



Rim Shearlock 12V DC 2 Amp
AR/E-M8015

ARRONE® Shearlock Magnets by Openers and Closers®

What is a Shearlock Magnet?

- A Shearlock is an electromagnetic security lock with a holding power of up to 15,000 Newtons. It can be installed on all kinds of left and right-handed doors (metal, wooden and glass). It is the ideal electric lock for swing doors and controlling emergency doors equipped with panic locks.

operation

- The Openers & Closers Shearlock combines magnetic and mechanical force with state-of-the-art electronic technology.
- A magnetic sensor detects when the door and doorframe are aligned and causes the Shearlock to lock the door in place.
- It is designed to operate on 10-36V DC, so the installer does not have to set the voltage. There are two power connections.
- The Shearlock also has an adjustable delay system, which means a delay of between 1 and 25 seconds for release and locking can be set.
- If the Shearlock is deactivated, the door is released. If however, the door is not physically opened within the programmed time limit (locking delay), the Shearlock locks the door again.
- The Shearlock is designed to be connected to heat and smoke detectors and similar devices. If a fire is detected, the Shearlock immediately releases the door.

time delays

- Locking prevention: This connection keeps the door released, even though the power is connected.
- Opening prevention: Either through an instantaneous connection or a button with timed opening.

LED indicators

- Green: Door Released
- Red: Door Locked
- Amber: Malfunction or transitory state

ID NO	PRODUCT REF	DESCRIPTION
87105614	AR/E-M8016	Mortice Shearlock 12V DC 2 Amp
87105613	AR/E-M8015	Rim Shearlock 12V DC 2 Amp

ARRONE® Shearlock Magnets and Solenoid Bolts

Shearlocks

This self-aligning magnetic Shearlock will suit swing-through doors, as well as traditional single action doors. The magnet is constantly powered and “looking” for the armature, once the armature starts to come into line with the magnet, it is attracted upwards and “snaps” into position once alignment is correct. Monitored as standard.

features

- Finish - Stainless Steel
- Voltage - 12/24V DC
- Current - 630mA @ 12V DC,
- 313mA @ 24V DC
- Dimensions - 230 x 30 x 38mm
- Holding Force - 1500kg



Shearlock, self-aligning for single action or swing-through door
AR/E-CSL-30

ID NO	PRODUCT REF	DESCRIPTION
87108155	AR/E-CSL-30	Shearlock, self-aligning for single action or swing-through door 12/24V DC

Shearlock Rim

The Shearlock will suit single action doors, and double action doors providing the door closers return the doors to the same position every time. The magnet “powers” once it sees the armature - An in-rush of current maximises the magnetic effect to pull the armature into place. Monitored as standard.

features

- Finish - Stainless Steel
- Voltage - 12/24V DC
- Current - 630mA @ 12V DC,
- 313mA @ 24V DC
- In-rush Current - 2.08A @ 12V DC, 1.05A @ 24V DC
- Dimensions - 268 x 30 x 35mm
- Holding Force - 1200kg



Shearlock Rim, self-aligning
AR/E-SHL-1200

ID NO	PRODUCT REF	DESCRIPTION
87108165	AR/E-SHL-1200	Shearlock Rim, self-aligning 12/24V DC

Solenoid Bolts

The Solenoid Bolt is a fail unlocked solenoid bolt. Manufactured in stainless steel, with lock and door status monitoring as standard, incorporating a “spinning” bolt to prevent sawing.

features

- Finish - Stainless Steel Faceplates
- Voltage - 12V DC
- Current - 140mA maintained,
- 1.1A in-rush
- Dimensions - 200 x 27 x 42mm
- Holding force - Up to 800kg



Solenoid Bolt Monitored Narrow Stile Fail Unlocked 12V DC
AR/E-S9010

ID NO	PRODUCT REF	DESCRIPTION
87105907	AR/E-S9010	Solenoid Bolt DC Fail Unlocked with built in sensor 12V DC

ARRONE® Electric Locks



FIRE lock european Approval 12V
DC Fail Unlocked
AR/E-FIRELOCK 12

Firelock

The FIRELOCK-24 is a rugged, electronic lock designed for use on fire exit doors. The unit has a release mechanism which means it will release a door even when subjected to a sideload pressure of 100Kg - this makes the unit ideal for designated fire exit routes where electronic locking is required to provide security.

Manufactured in stainless steel, the unit is non-handed and can be mounted in the horizontal or vertical plain. In the locked position, it throws a 24mm deadbolt into a monitored keep, which makes the security of the lock extremely high.

Because of the unique capture mechanism of the bolt, the unit is suitable for sliding doors as the bolt can be re-positioned by 90° to secure doors which slide. Additionally, the unit is suitable for double-action (swing-through) doors, as the bolt is "captured" by the keeper as it passes through.

features

- Finish - Stainless Steel
- Voltage - 12V, 24V or 48V DC versions available
- Note: 24V and 48V are order to order
- Working Current - 630mA @ 12V DC, 313mA @ 24V DC, 160mA @ 48V DC
- Dimensions - 350 x 33 x 50mm
- 100kg Sideload Release
- Vertical or Horizontal Mount
- Fail Unlocked



Quality & Performance: The FIRELOCK-24 has European Approval for use on fire exits (NFS 61-937 Fire door safety directive)

ID NO	PRODUCT REF	DESCRIPTION
87108161	AR/E-FIRELOCK 12	FIRE lock european Approval 12V DC Fail Unlocked



Rim Motor lock
AR/E-MVM

Electric Locks

Rim Motor Lock ideal for pedestrian gates, internal and external doors. The unit drives a deadbolt into a monitored keep to provide high security locking.

The locks are supplied with key override as standard.

ID NO	PRODUCT REF	DESCRIPTION
87108162	AR/E-MVM	Rim Motor lock (Grey & Silver)

ARRONE® Multipoint Electronic Lock

Multipoint Electronic Lock

Multi-point electronic lock designed for use on timber, composite and uPVC doors supplied as a complete unit.

Suited for new doors and to retrofit to existing doors.

Available in various options and backsets to suit most doors.

features

- 3-Point locking
- 3 Motorised locks
- Full vertical mount
- Deadbolt option
- Patented mechanism
- 35 or 45mm backset
- 12V DC
- 16mm or 24mm faceplate
- Temp -20°C to +70°C

ID NO	PRODUCT REF	DESCRIPTION
87108186	AR/E-TF3M35/24U	35mm backset, with deadbolt, for uPVC
87108187	AR/E-TF3M45/24U	45mm backset, with deadbolt, for uPVC
87108189	AR/E-TF3M45/16	45mm backset, with deadbolt, for timber
87108190	AR/E-TF3M45/24	45mm backset, with deadbolt, for timber
87108191	AR/E-TF3M35/24U/SPP	35mm backset, without deadbolt, for uPVC
87108192	AR/E-TF3M45/24U/SPP	45mm backset, without deadbolt, for uPVC
87108193	AR/E-TF3M35/16/SPP	35mm backset, without deadbolt, for timber
87108194	AR/E-TF3M45/16/SPP	45mm backset, without deadbolt, for timber



Multipoint Electronic Lock

Please note

To select the correct size:

Backset Faceplate uPVC
AR/E-TF3M (35) / (24) U

ARRONE® Accessories



Egress Button Flush Stainless Steel
AR/E-C6017



Egress Button Surface Stainless Steel
AR/E-C6025



Egress Button Surface Fix Plastic
AR/E-C6021



Green Dome Egress Button Flush
Fix Stainless Steel
AR/E-C6019



Green Dome Egress Button Surface
AR/E-RTE/S/SSD



Push Button Emergency Unit -
Single Pole
AR/E-C6022



Disabled Push Open Egress Button
Flush Stainless Steel
AR/E-CM41-4 & AR/E-CM43-F



Disabled Push Open Egress Button
Surface Stainless Steel
AR/E-CM41-4 & AR/E-CM43-S

ID NO	PRODUCT REF	DESCRIPTION
87105780	AR/E-C6017	Egress Button Flush Stainless Steel

ID NO	PRODUCT REF	DESCRIPTION
87105788	AR/E-C6025	Egress Button Surface Stainless Steel

ID NO	PRODUCT REF	DESCRIPTION
87105784	AR/E-C6021	Egress Button Surface Fix Plastic

ID NO	PRODUCT REF	DESCRIPTION
87105782	AR/E-C6019	Green Dome Egress Button Flush Fix Stainless Steel

ID NO	PRODUCT REF	DESCRIPTION
87108125	AR/E-RTE/S/SSD	Green Dome Egress Button Surface

ID NO	PRODUCT REF	DESCRIPTION
87105785	AR/E-C6022	Push Button Emergency Unit - Single Pole

ARRONE® Exit Egress Switches

please note

When ordering an all-active exit switch please state a surface back box or flush back box.

ID NO	PRODUCT REF	DESCRIPTION
87108119	AR/E-CM41-2	All-active exit switch, stainless, disabled logo
87108120	AR/E-CM41-3	All-active exit switch, stainless, push to open
87108121	AR/E-CM41-4	All-active exit switch, stainless, push to open & Disabled Logo
87108122	AR/E-CM43-S	Surface Back Box for CM41 SERIES
87108123	AR/E-CM43-F	Flush Back Box for CM41 SERIES

ARRONE® Accessories

Key Switch

A range of flush and surface key switches, finished in stainless steel and supplied in various forms.

Cylinder not supplied on Euro key switches

ID NO	PRODUCT REF	DESCRIPTION
87108086	AR/E-KS/SS/EUS-MA	Euro style Key Switch Surface - Maintained
87108124	AR/E-KS/SS/EUS/MO	Euro style stainless Key Switch Surface - Momentary
87108085	AR/E-KS/SS/EUF/MA	Euro style stainless Key Switch Surface - flush maintained



Euro-profile keyswitch Surface
Stainless Steel
AR/E-KS/SS/EUS-MO



Concealed Door Loop
AR/E-C6024

Door Loops

ID NO	PRODUCT REF	DESCRIPTION
87105787	AR/E-C6024	Concealed Door Loop
87105786	AR/E-C6023	Standard Door Loop
87108118	AR/E-FM	Vandal Resistant Doorloop



Standard Door Loop
AR/E-C6023

Power Transfers

ID NO	PRODUCT REF	DESCRIPTION
87108874	AR/E-CE2P	Power Transfer Hinge 2 Pin
87108875	AR/E-CE3P	Power Transfer Hinge 3 Pin



Vandal Resistant Doorloop
AR/E-FM

Timers

A range of 7-day, 24-hour timers with 7 start/stop times each day. Available in 12V, 24V, these timers are ideal for providing "trades" or "free access" times.

ID NO	PRODUCT REF	DESCRIPTION
87108876	AR/E-TH827-12	7 Day Timer 12V AC/DC
87108877	AR/E-TPG-1	0-20 Second Relay/Timer 12/24V DC
87108878	AR/E-T160	0-60 Sec or 0-60 Min Relay/Timer 12/24V DC



Transfer Hinges
AR/E-C2P - AR/E-C3P

Relays & Interlock

A range of relays and interlock controllers to provide flexible solutions for a variety of encountered on-site problems.

The ILM-400 (2-4 door interlock) can be linked together to provide much larger interlocking if required.



Timer 12V DC
AR/E-TH827-12

ID NO	PRODUCT REF	DESCRIPTION
87108879	AR/E-VHLR	Relay, 12/24V AC/DC
87108880	AR/E-ILM-100	2-Door interlock
87108882	AR/E-ILM-400	4-Door interlock



2/4 Door Interlock Controller
AR/E-ILM-100 - AR/E-ILM-400

ARRONE® Accessories



Power Supply 12V DC 1Amp in metal box with Charger
AR/E-PSU12/1S - AR/E-P4010

Power Supply

ID NO	PRODUCT REF	DESCRIPTION
87108116	AR/E-PSU12/1S	Power Supply 12V DC 1Amp in metal box with Charger
87105797	AR/E-P4010	Power Supply 12V DC 2Amp in metal box with Charger



YUASA Battery 12V 7AH
AR/E-B4012

Batteries

ID NO	PRODUCT REF	DESCRIPTION
87105908	AR/E-B4012	YUASA Battery 12V 7AH NP7-12 suits 2Amp PSU
87108143	AR/E-SL1223	Battery 12V 7AH NP7-12 suits 1Amp PSU



Receiver Unit Single Channel 4 Relays 12/24V
AR/E-C6028

Remote Control Transmitter & Receiver

To be used in conjunction with remote access such as door operator and controlled electric locking.

ID NO	PRODUCT REF	DESCRIPTION
87105958	AR/E-C6028	Receiver Unit Single Channel 4 Relays 12/24V
87105959	AR/E-C6029	Transmitter Token



Receiver Token
AR/E-C6029

Videx Biometric & Proximity Module Readers

Videx Biometrics Reader

BioAccess fingerprint reader (thermal sensor), with dry contact relay outputs and serial communication ports.

The units are available in either standalone or networked.

Database logs up to 12800 occurrences, Real Time Clock with backup battery. Relay activation time programmable from 1 to 99 secs for each relay.

features

- PC software for fingerprint programming and management
- 3 relays with C, NC, NO contacts (24VAC/DC Max 3A)
- 3 inputs (active low type) for relay direct activation
- RS-232, RS-485 and WIEGAND serial interfaces
- Working voltage: 12/24VAC/DC
- Sensor Type: Swipe Thermal
- Sensor Resolution: 500dpi
- Recognising Time: <1 second
- Working temperature: -10°C +60°C
- Programming: Stand-alone or PC
- Depending upon the module version, 1000 or 3000 users can be stored



Biometrics Reader

Videx Proximity Reader

Proximity key reader range has been increased to include two new standalone modules.

The programming can be carried out through the 4 buttons on the back of the module or through a PC.

Acoustic and visual signalling while programming (4 LEDs on the back of the module) and 1 tri state LED on the front of the module).

features

- Relay activation time programmable from 1 to 99 secs
- 1 relay with C, NC, NO contacts (24VAC/DC Max 3A)
- 1 input (active low type) for relay direct activation
- RS-232, RS-485
- Working voltage: 12/24VAC/DC
- Recognising Time: <1 second
- Working temperature: -10°C +60°C



Proximity Reader

Please call ARRONE® Access for full specification and quotation

VIDEX Audio & Video Kits

VIDEX Audio & Video Kits



1 Way Audio Door Entry **AR/E-3K1S**
2 Way Audio Door Entry **AR/E-3K2S**

Audio Kit

The kits have a built-in lock relay to enable the electric lock. This reduced cable requirement allows longer cable runs and reduced cable sizes to be used between the two units.

One outdoor station including a one/two call button speaker unit, flush mounting box with module support and hinge Plus covering frame. Standard front plate finish in stainless steel.

ID NO	PRODUCT REF	DESCRIPTION
87107185	AR/E-3K1S	1 Way Audio Door Entry
87107186	AR/E-3K2S	2 Way Audio Door Entry



1 Way Slimline Audio Door Entry Kit
AR/E-SLK 1

Slim Kit Audio

When a caller presses the call button this will produce an electronic call tone at the telephone handset. When answered, the caller and occupant can have a two way conversation.

If required the occupant can then release the door/gate by pressing the release button on the telephone handset.

features

- Voltage: 13 Volt AC
- Max. No. of handsets: 3 per apartment

accessories

- Additional handsets
- Additional sounders
- Telephone interface unit door panel sizes: 1 & 2 way

ID NO	PRODUCT REF	DESCRIPTION
87108179	AR/E-SLK 1	1 Way Slimline Audio Door Entry Kit
87108180	AR/E-SLK-1-D	1 Way Slimline Audio Door Entry Kit with Disable Sign on panel



1 Way Audio Door Entry with Keypad
AR/E-DK1S

Digiphone Kit

The range of modular door panels creating a high quality robust door entry kit combined with coded access.

New modern design 4000 series door panel and 3000 series telephone.

- Blue back lit interchangeable name plate
- Door panel facia stainless steel
- Door panel frame available in gun metal grey

ID NO	PRODUCT REF	DESCRIPTION
87108178	AR/E-DK1S	1 Way Audio Door Entry with Keypad
87107187	AR/E-DK11	2 Way Audio Door Entry with Keypad

VIDEX Stainless Steel Door Entry Panels

From 1 to 19 Buttons vandal resistant kit including a flush mounted door panel with call button and standard engraving.

All stainless steel push buttons are IP 66 rated and the panel itself is made from tough 12 gauge stainless steel.

It is secured to the galvanised flush back plate with a stainless steel bezel with fixing screws.


The latest addition to Videx Security's range of special needs door entry equipment for the visually impaired is the new vandal resistant digital door entry panel.

A key feature of the new panel is a large back-lit, sixteen character visitor information LCD display which includes large 9 mm high characters.

The large stainless steel push buttons feature relief engraved numbers and a highly visible yellow halo. Also to assist the visually impaired, voice communication verifies each stage of a call verbally.



Audio 1 Way Stainless Steel



**Example 1 to 5 Audio
Stainless Steel with Keypad**



**Example
Special Needs Door Entry Equipment**



**Example
Video Stainless Steel with Keypad**

Please call ARRONE® Access for full specification and quotation

VIDEX Eclipse Range



Video Monitor Silver



Video Monitor White



Hand Set

VIDEX have developed a stylish new hands free videophone.

The Eclipse hands-free videophone is a digital door panel designed to cater for special needs.

The unit is available in both surface and flush monitors with full hands free function and full duplex speech for ease of use, but has the option to switch into simplex speech when required.

features

- 4" TFT colour monitor
- 6 push buttons
- Door-open
- Camera-recall
- Privacy (timed or switched)
- ON/OFF latch relay
- 2 service push buttons
- Speech line volume
- Call tone volume

Door Entry Systems

SRS Video Door Entry System

A narrow stile video entry kit with plugin power supply.

features

- Calls up to 3 monitors
- Extra monitors available order to order
- Height 133mm - Width 58mm - Depth 40mm

ID NO	PRODUCT REF	DESCRIPTION
87108184	AR/E-SD880	1 Way Slimline Video Door Entry Kit Black & White



1 Way Slimline Video Door Entry Kit
Black & White
AR/E-SD880

CDV Audio and Video Door Entry Kits

features

- 1 way Audio Kit
- Two wire communication
- Stainless Steel Door Station
- 12 VAC Transformer supplied
- Dimensions: Flush Panel 83mm x 33mm x 10mm Surface Panel 83mm x 33mm x 29mm

ID NO	PRODUCT REF	DESCRIPTION
87108181	AR/E-KITDP-2KN-SS-GAER	1 Way Audio Entry Kit with Electric Release



1 Way Audio Entry Kit with Electric
Release
AR/E-KITDP-2KN-SS-GAER

KABA Generation 760 Series



Hotel lock
AR/E-760

Generation AR/E-760 Lock

The Generation AR/E-760 is designed to offer the ultimate in security and easy to use management features without sacrificing the individual style and design requirements of our valued hotel customers.

It has an advanced audit trail and a system that ensures complete control of staff and guests. The Generation AR/E-760 is the perfect solution for the hotel and university locking system.

ID NO	PRODUCT REF	DESCRIPTION
87108173	AR/E-760	Hotel lock



Hotel lock with Cylinder
AR/E-762

Generation AR/E-762 Lock

The Generation AR/E-762 is designed to offer the ultimate in security and easy to use management features without sacrificing the individual style and design requirements of our valued hotel customers. It has an advanced audit trail and a system that ensures complete control of staff and guests. The Generation AR/E-760 is the perfect solution for the hotel and university locking system.

ID NO	PRODUCT REF	DESCRIPTION
87108172	AR/E-762	Hotel lock with Cylinder Key Over Ride



Hotel Encoder and Software
AR/E-763

Front Desk Unit AR/E-763

Advanced ergonomic designs, and a footprint smaller than a standard sheet of paper, make the Generation AR/E-763 Front Desk Unit the most user-friendly on the market.

It is the brains of the system, and requires no PC or database support to encode keycards or to program and audit the locks.

ID NO	PRODUCT REF	DESCRIPTION
87108170	AR/E-763	Hotel Encoder and Software

Accessories

ID NO	PRODUCT REF	DESCRIPTION
87108171	AR/E-766	User Card
87108174	AR/E-700	Energy Saver Unit
87108175	AR/E-765	Hotel Reader Unit

SAFLOK® University Locking



SAFLOK Confidant MT

SAFLOK® Confidant MT

SAFLOK® Confidant MT lock, provides an aesthetically pleasing lock that includes the latest advancements in electronic lock technology.

Featuring a unique design for both contemporary buildings and those with a more classic architectural style.

SAFLOK® Confidant MT is ideal for University Locking and Nursing Homes.

SAFLOK® has more than 25 years experience developing and manufacturing electronic locks. The company has installed electronic locks and operating systems in thousands of hotels around the world.

SAFLOK® Confidant MT specification can be installed to any standard European DIN standard mortice lock or latch that employs an 8mm spindle.

features

- Optional mechanical key override
- Operates on a standard AA alkaline battery pack
- Door thickness - 38mm - 50mm
- Escutcheon - 201mm x 61mm
- Finish - Satin Chrome

Please call ARRONE® Access for full specification and quotation

Online Access Control

Link Net



Biometric Reader



Proximity Reader



Transponder



Software



Online Access Control

Link net brings to life the concept of the “active building” - a fully monitored, fully secure access control and personnel management solution with high level reporting.

Utilising a combination of long and short range tags and readers, Link.net can open parking barriers, control door access, provide reception control and monitor valuable assets as well as providing data output for a variety of report structures.

Another benefit is the real-time information for Evacuation Control and Time & Attendance monitoring. Link.net provides dynamic “who’s on site and where” convenience of locating personnel, or can generate automatic reports for “mustering” purposes - additionally, Link.net has its own “Time On Site” reporting, or it can interface to a 3rd party system for full Time & Attendance reports.

Link.net installation is flexible and can use either dedicated wiring or a standard network (TCP/IP) infrastructure. Multiple alarm conditions can be set and alerts sent as email or sms messages to your mobile phone.

With its modular architecture Link.net can monitor anything from a single door to multiple buildings across multiple sites.

feature types of reader

- Proximity Readers
- Active Proximity Readers
- Keypad Readers
- Biometric Readers

Please call **ARRONE® Access** for full specification and quotation

HOPPE SecuSignal®



Does the following situation sound familiar to you?

Monday morning - you leave home in a hurry. Just as you've closed the door you begin to wonder "Did I close all the windows in case it rains? Did I remember to close the French doors to the patio last night or are they only tilted - an open invitation to intruders?"

In order to be sure, the only thing to do is to open the door, go back inside and check each window upstairs and downstairs to make sure you haven't forgotten one...

Wouldn't it be more assuring if, before you left the house, you could check at a glance whether all windows were closed or not? SecuSignal® HOPPE's new window handle generation with integrated cable and radio technology - without the need for batteries - can offer you just that!

Once the receiver has been connected to the mains (220V) and the window handle has been set, the emitter sends information about the position of the window handle - and the window handle itself, directly to the receiver unit. Here this information is shown by coloured lights with an indication of the room concerned in a two digit display and stored in such a way you can check at a glance whether your windows are open or not at any time.

The SecuSignal® emitter needs neither wiring nor batteries

In turning the SecuSignal® window handle, energy is produced by a patented system, so no tiresome checking or changing of batteries is necessary and no batteries need to be disposed of either, preventing further harm to the environment. The SecuSignal® radio emitter is totally maintenance-free.

To ensure a high assurance of transmission, the radio signal is sent out many times in short succession at just one turn of the handle. Depending on the type of building, range is about 30m. With its advanced technology, SecuSignal® works with minimal transmitter power, so any electromagnetic pollution is minimal.



SecuSignal Window Handle



SecuSignal Receiver



Technology from EnOcean

Please call ARRONE® Access for full specification and quotation

